


Running-Lighting Unit

Trunking Lighting Systems - Lighting Units



Colour Options

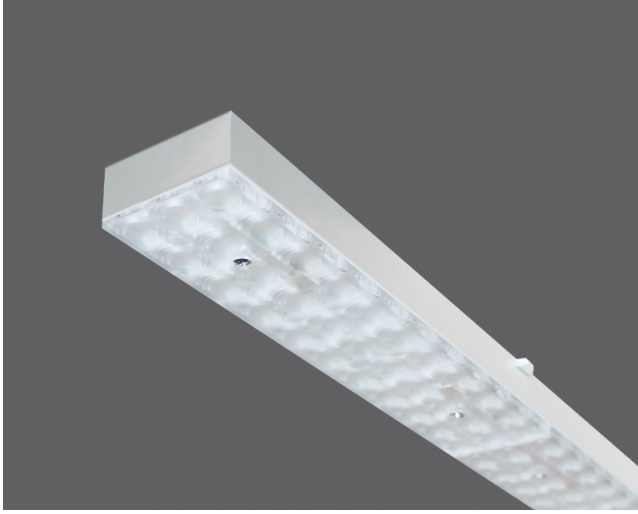

TECHNICAL INFORMATION

Housing	Electrostatic Powder Coated Aluminum Profile
Side Cover	PC Injection
Diffuser	High Light Transmittance Optical Lens
Dimensions(mm)	65x38mm

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical / Asymmetrical
Light Output Angle	30°Sym / 60°Sym / 90°Sym / 2x25°Asym
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	52-78W
Power Factor	>0.95
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20 °C/+40 °C
LED Lifetime L90B10	>100.000 Hours

OPTIONAL

DALI *
1-10V DIM *
DC Operation Mode
Emergency Kit (1h/3h)
2700K ~ 6500K

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Steel Spring



Order Code	W	Lm	CCT	Angle	L (mm)	Kg
------------	---	----	-----	-------	--------	----

