


# Running-Lighting Unit

Trunking Lighting Systems - Lighting Units



Colour Options

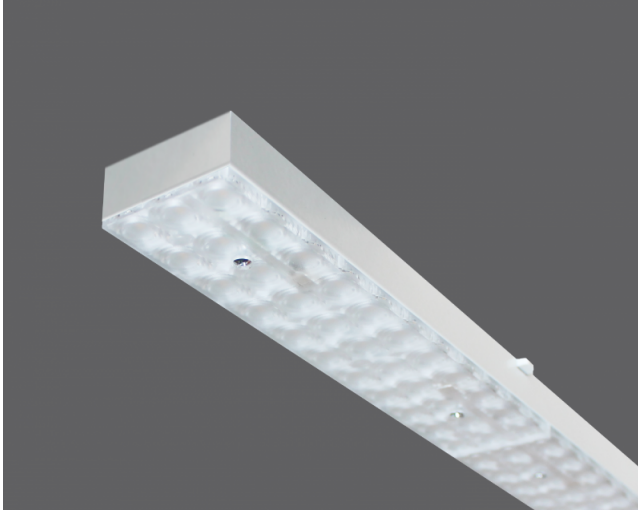

## TECHNICAL INFORMATION

|                       |                                              |
|-----------------------|----------------------------------------------|
| <b>Housing</b>        | Electrostatic Powder Coated Aluminum Profile |
| <b>Side Cover</b>     | PC Injection                                 |
| <b>Diffuser</b>       | High Light Transmittance Optical Lens        |
| <b>Dimensions(mm)</b> | 65x38mm                                      |

## OPTICAL SPECIFICATIONS

|                           |                                      |
|---------------------------|--------------------------------------|
| <b>Light Distribution</b> | Symmetrical / Asymmetrical           |
| <b>Light Output Angle</b> | 30°Sym / 60°Sym / 90°Sym / 2x25°Asym |
| <b>UGR Value</b>          | UGR ≤ 22                             |
| <b>CRI</b>                | CRI ≥ 80                             |
| <b>Color Bin Value</b>    | Mc Adams ≤ 3                         |

## ELECTRICAL




|                            |                                         |
|----------------------------|-----------------------------------------|
| <b>Power (W)</b>           | 52-78W                                  |
| <b>Power Factor</b>        | >0.95                                   |
| <b>Cabling</b>             | Halojen-Free                            |
| <b>Input Voltage</b>       | 220-240V AC / 50-60 Hz                  |
| <b>LED Driver</b>          | High Efficiency Constant Current Output |
| <b>Ambient Temperature</b> | -20 °C/+40 °C                           |
| <b>LED Lifetime L90B10</b> | >100.000 Hours                          |

## OPTIONAL

DALI \*  
1-10V DIM \*  
DC Operation Mode  
Emergency Kit (1h/3h)  
2700K ~ 6500K

## ASSEMBLY

|                           |                          |
|---------------------------|--------------------------|
| <b>Installation Type</b>  | Surface Mounted, Pendant |
| <b>Mounting Apparatus</b> | Steel Spring             |



| Order Code | W | Lm | CCT | Angle | L (mm) | Kg |
|------------|---|----|-----|-------|--------|----|
|------------|---|----|-----|-------|--------|----|

