


Lightline-046

Indoor Lighting - Linear Lighting



Colour Options

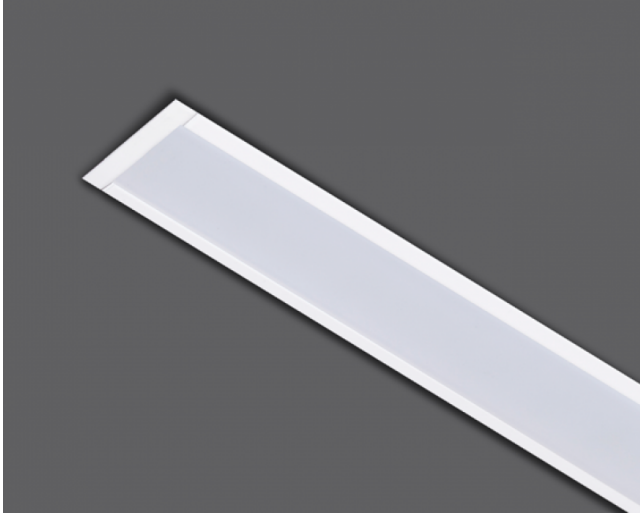

Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Aluminum Injection
Diffuser	Highly Transmissive Opal Diffuser
Paint	Electrostatic Powder Paint
Dimensions(mm)	46(W) x 37(H)

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	16W / meter
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency External Constant Voltage Output (24VDC)
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Under Plaster
Mounting Apparatus	Steel Spring

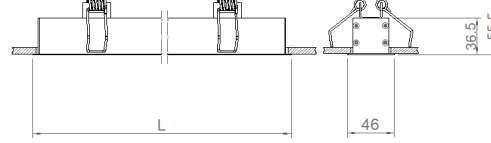

Order Code	W	Lm	CCT	CRI	L (mm)	Cut-out dimensions (mm)	Kg
02155.45.30.015	16	672	3000	Ra>80	1056	38x1047	1,0
02155.45.40.016	16	708	4000	Ra>80	1056	38x1047	1,0

