

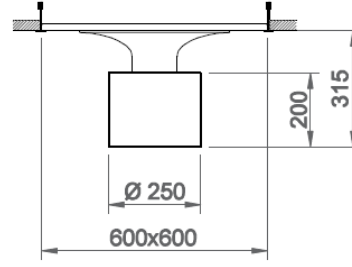


# Noon Mini

Indoor Lighting - Recessed Lighting



## TECHNICAL INFORMATION

|                        |                                             |
|------------------------|---------------------------------------------|
| <b>Housing</b>         | Aluminum profile with electrostatic coating |
| <b>Optics</b>          | Highly transmissive opal diffuser           |
| <b>LED Lifetime</b>    | 50.000 hours                                |
| <b>L80B50</b>          |                                             |
| <b>Mounting System</b> | Recessed                                    |

## OPTICAL SPECIFICATIONS

|                                |              |
|--------------------------------|--------------|
| <b>Light Distribution</b>      | Symmetrical  |
| <b>Light Output Angle</b>      | 120°         |
| <b>UGR Value</b>               | 80           |
| <b>Color Bin Value</b>         | Mc Adams < 3 |
| <b>Color Temperature (CCT)</b> | 3000K/4000K  |

## ELECTRICAL

|                      |                     |
|----------------------|---------------------|
| <b>Power (W)</b>     | 18W                 |
| <b>Power Factor</b>  | >95                 |
| <b>Light Source</b>  | SMD Mid Power LED   |
| <b>Cabling</b>       | Halogen-Free        |
| <b>Input Voltage</b> | 220-240V / 50-60 Hz |

## OPTIONAL

DALI  
Emergency Lighting Unit  
Tunable White

## ASSEMBLY

**Installation Type** Under Plaster

| Order Code      | W  | Lm   | CCT  | CRI   | WxLxH (mm)  | Kg  |
|-----------------|----|------|------|-------|-------------|-----|
| 02137.25.30.017 | 18 | 1625 | 3000 | Ra>80 | 600x600x315 | 3,0 |
| 02137.25.40.018 | 18 | 1710 | 4000 | Ra>80 | 600x600x315 | 3,0 |

