




Corvus-T 900
03170

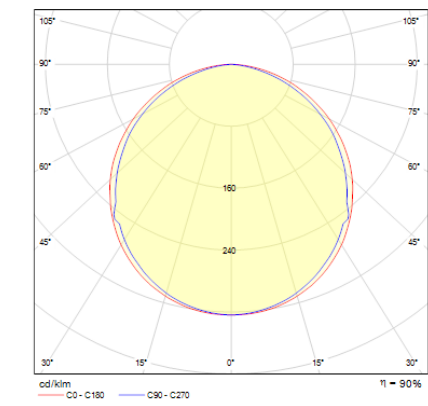

General Information		Electrical Info		Lighting Technology	
Housing	Extruded Aluminum Profile	Power	69W	Optics	Symmetrical
Diffuser	High Transmittance Opal Diffuser	Power Factor	>0.95	Light Output Angle	120°
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	UGR Value	UGR ≤ 22
		Cabling	Halogen-Free	CRI [Ra]	CRI ≥ 80
		Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
		LED Driver	High Efficiency Constant Current Output		
		Ambient Temperature	-20°C / +50°C	Optional	
		LED Lifetime L70	>50.000 Hour		
				DALI / 1-10V	
				1-10V DIM	
				Tunable White	
				Emergency Lighting Unit	
				CRI>90 , 2700K~6500K , Tunable White	
				2700K ~ 6500K	
				Different RAL Color Options	
				Plug-in Connector	
				Class-II Protection Class	
				PIR Sensor	
				AC-DC Supply(MBS)	

Order Code	W	Lm	CCT	CRI	ØD x H (mm)	Kg
03170.90.30.107	69	6.220	3000	Ra>80	900x100	5,5
03170.90.40.111	69	6.550	4000	Ra>80	900x100	5,5