




CORVUS-T

03170

Circular Surface Mounted Luminarie

The Corvus T series, with its solid circular form and surface-mounted design, offers an aesthetic lighting solution for modern projects. Its slim aluminum profile body provides a minimalist aesthetic. It blends seamlessly into contemporary interiors in offices, social areas, hotels, and commercial projects. The surface-mounted design is a stylish and functional alternative, especially in applications where there is no suspended ceiling space.

Thanks to our manufacturing infrastructure, the Corvus T series can be produced in various diameters, going beyond standard sizes to meet project-specific design needs. With different diameter, color temperature, and control options, it offers flexible lighting solutions for architectural concepts, while its simple form and high-quality light effect create a strong architectural accent in spaces.

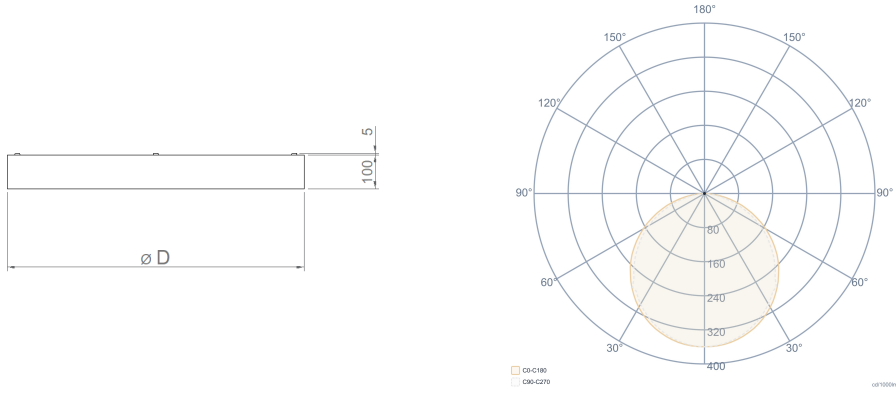

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	20W	Light Output Angle	120°
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	Ø380/500/600/900/1200x100(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Surface and Pendant	LED Driver	Constant Current		
Mounting Part	Screw Dowel Set	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØD (mm)	Kg
03170.12.30.092	96	8665	3000	Ø1200	7,40

