



RAL 9016 RAL 9006



EVEN-G 1200

02142

IP54-30x120cm Sterile Lighting Fixture

The Even-G 1200, with its 300x1200mm dimensions, is an IP54 protected indoor lighting solution specifically designed to provide homogeneous lighting in corridors, healthcare facilities, and long spaces. Its slim and elongated form allows it to blend seamlessly with linear architecture, creating a neat and aesthetically pleasing appearance.

Its silicone seal provides protection against dust and moisture. Thanks to its metal sheet housing and 120° wide beam angle, it delivers effective and reliable lighting performance in corridors, hospitals, laboratories, educational facilities, and areas requiring high hygiene standards.

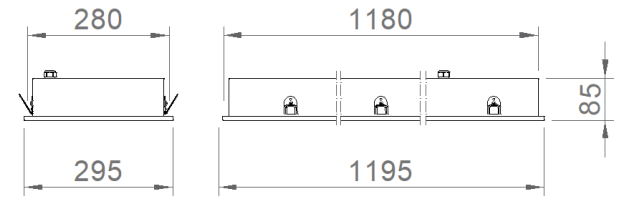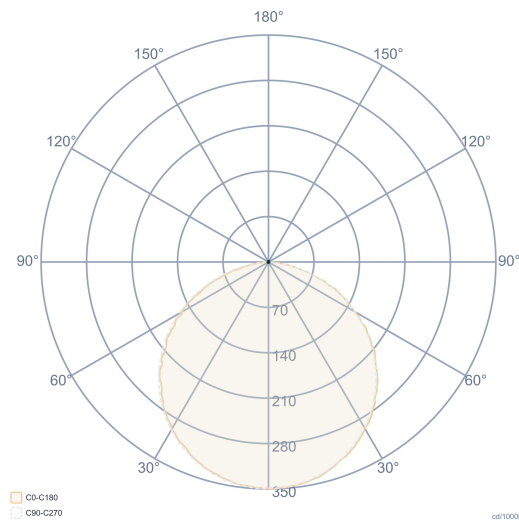

General Information		Electrical Info		Lighting Technology	
Housing	DKP Metal Sheet	Power	33-52W	Light Output Angle	120°
Diffuser	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	295(W) x 1195(L) x 85(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Recessed	LED Driver	Constant Current		
Mounting Part	Steel Spring	Ambient Temperature	0°C / +40°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02142.31.30.032	33	3530	3000	295x1195x85	280x1180	3,50
02142.31.40.033	33	3630	4000	295x1195x85	280x1180	3,50
02142.31.30.040	52	5620	3000	295x1195x85	280x1180	3,50
02142.31.40.041	52	5720	4000	295x1195x85	280x1180	3,50

