

Even-G 1200

Indoor Lighting - Sterile Environment Lighting



Colour Options

 Ral 9016
  Ral 9006
  Ral 9005

TECHNICAL INFORMATION

Housing Metal Sheet
Diffuser Opal Diffuser
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL

Power (W) 33-52W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature 0°C / +40°C
LED Lifetime L80B50 >50.000 Hour



OPTIONAL

- DALI
 - Tunable White
 - CRI > 90
 - Different RAL Color Options
 - Class-II Protection Class
 - AC-DC Supply(MBS)

- 1-10V DIM
 - Emergency Lighting Unit
 - 2700K ~ 6500K
 - Plug-in Connector
 - PIR Sensor

ASSEMBLY

Installation Type Under Plaster
Mounting Apparatus Metal Bracket

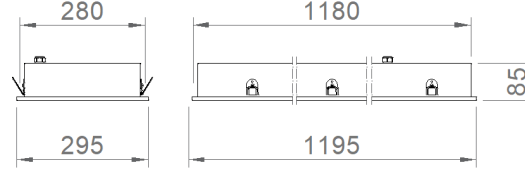

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02142.31.40.033	33	2690	4000	Ra>80	295x1195x85	280x1180	3,5

