


ESCAPE - Recessed

80520

Recessed - Emergency Exit Fixture

Escape Recessed Mounted is a flush-mounted directional luminaire designed to provide safe evacuation guidance in emergencies while maintaining architectural integrity. Its foil-printed acrylic lens and transparent plexiglass panel structure ensure clear visibility of escape directions even from long distances. Thanks to its built-in battery system, it continues to operate even during power outages, providing reliable guidance in emergencies.

Suitable for use in offices, hospitals, shopping malls, hotels, educational institutions, and all public buildings, Escape Flush-Mounted is an ideal emergency exit solution that combines high visibility, aesthetic design, and safety requirements.

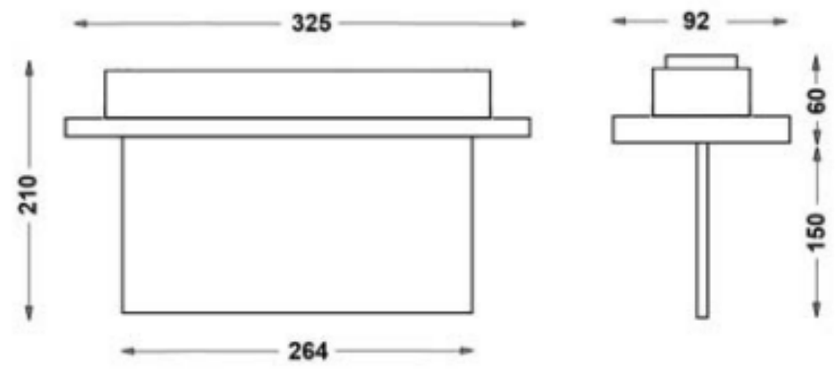

General Information	
Housing	Polycarbonate and Hanger Tie
Frame	Foil Printed Acrylic Lens
Diffuser	Transparent Plexiglass
Paint	Electrostatic Powder Paint
Insulation Class	Class II
Product Dimensions [mm]	92(W)x210(H)x264(L)
Mounting Type	Recessed
Mounting Part	Metal Bracket

Electrical Info	
Power	1.2W
Power Factor	>0.90
Light Source	SMD Mid Power LED
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current Output Rail
Ambient Temperature	0°C / +40°C

Lighting Technology
Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	How to use	Battery	WxHxL (mm)	Ceiling Cutting (mm)	Kg
80521.000.001-IK01	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.002-IK02	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.003-IK03	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.004-IK04	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.005-IK05	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.006-IK06	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.007-IK07	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.008-IK08	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.009-IK09	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.010-IK10	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.011-IK11	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.012-IK12	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.013-IK13	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.014-IK14	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.015-IK15	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.016-IK16	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.017-IK17	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.018-IK18	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.019-IK19	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.020-IK20	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.021-IK21	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.022-IK22	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.023-IK23	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33

80521.000.024-IK24	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80522.000.001-IK01-K02	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.003-IK03-IK04	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.005-IK05-IK06	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.007-IK07-IK08	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.009-IK09-IK10	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.011-IK11-IK12	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.013-IK13-IK14	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.015-IK15-IK16	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.017-IK17-IK18	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.019-IK19-IK20	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.021-IK021-IK21	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.022-IK22-IK23	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.024-IK24-IK25	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com