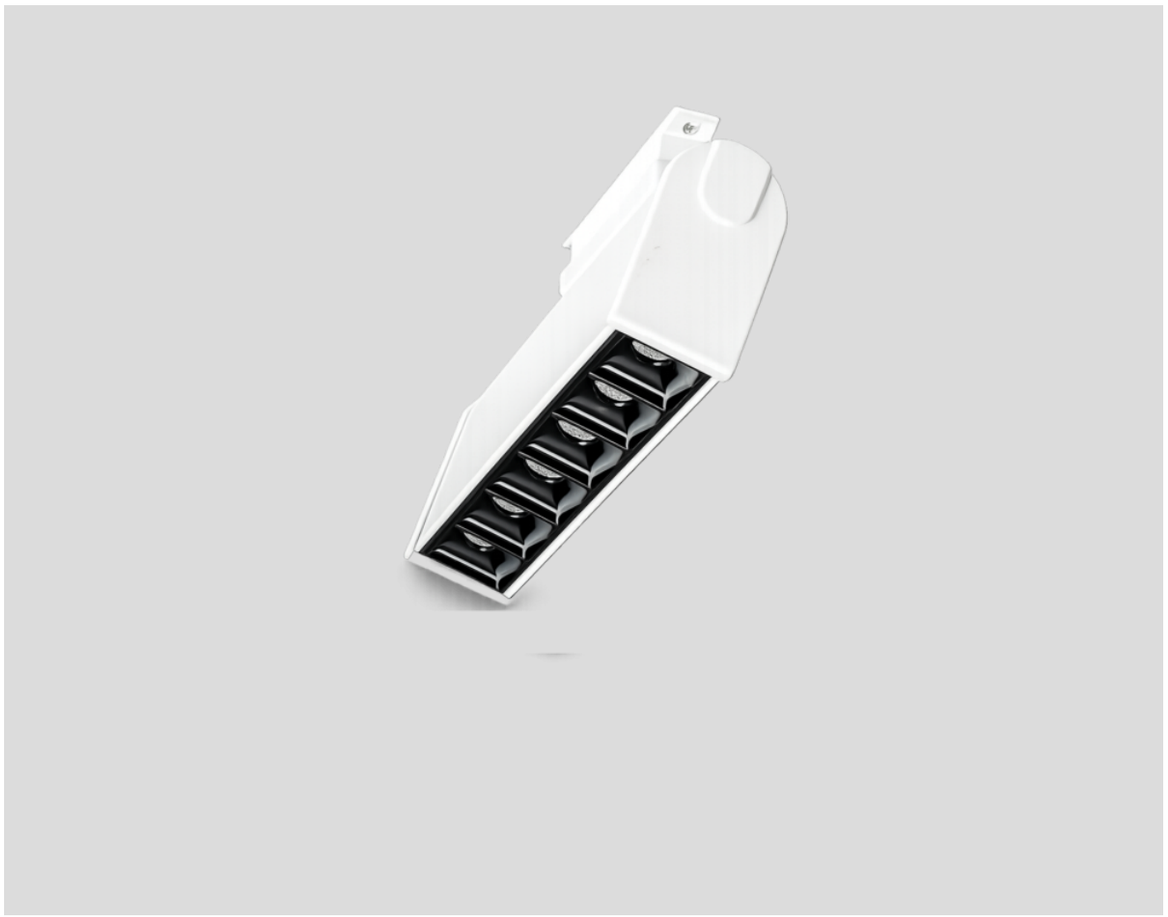



DUET-T


01199

Minimal Design, Controlled Lighting

Duet-T is our linear spot lighting solution developed for surface-mounted applications. Thanks to its multi-cell optical structure and anti-glare reflector, it provides visual comfort with UGR≤16, minimizing glare. With its controlled light distribution and modern design, it offers an aesthetic and high-performance solution for both general and accent lighting in offices, shops, showrooms, galleries, and other architectural interior spaces.

RAL 9016 RAL 9005 RAL 9006

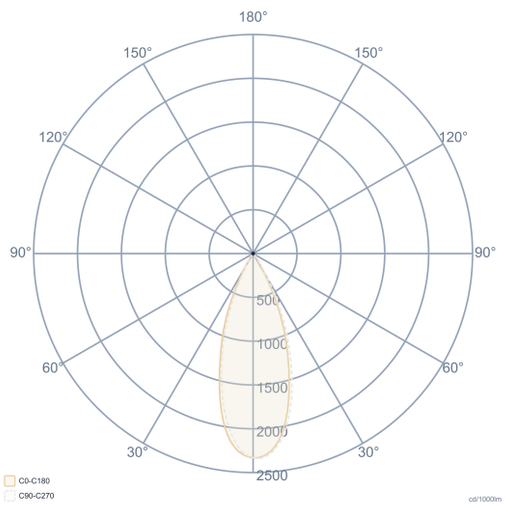

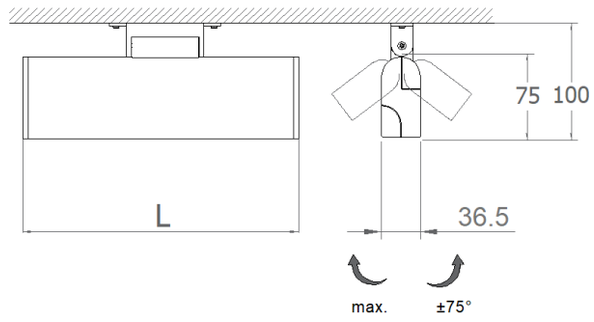

General Information	
Housing	Aluminum Extrusion Profile
Side Cover	Aluminum Injection
Optics	PMMA Lens + Reflector
Paint	Electrostatic Powder Coating
Insulation Class	Class I
Product Dimensions [mm]	280/430(W) x 36(L) x 100(H)
Mounting Type	Surface
Mounting Part	Metal Bracket

Electrical Info	
Power	22W-33W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	36°
UGR Value	UGR ≤ 16
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	WxLxH (mm)	Kg
01199.37.30.021	22	1840	36°	3000	280x36x100	0,70
01199.37.40.022	22	2040	36°	4000	280x36x100	0,70
01199.37.30.036	33	2760	36°	3000	430x36x100	1,10
01199.37.40.038	33	3060	36°	4000	430x36x100	1,10

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com