



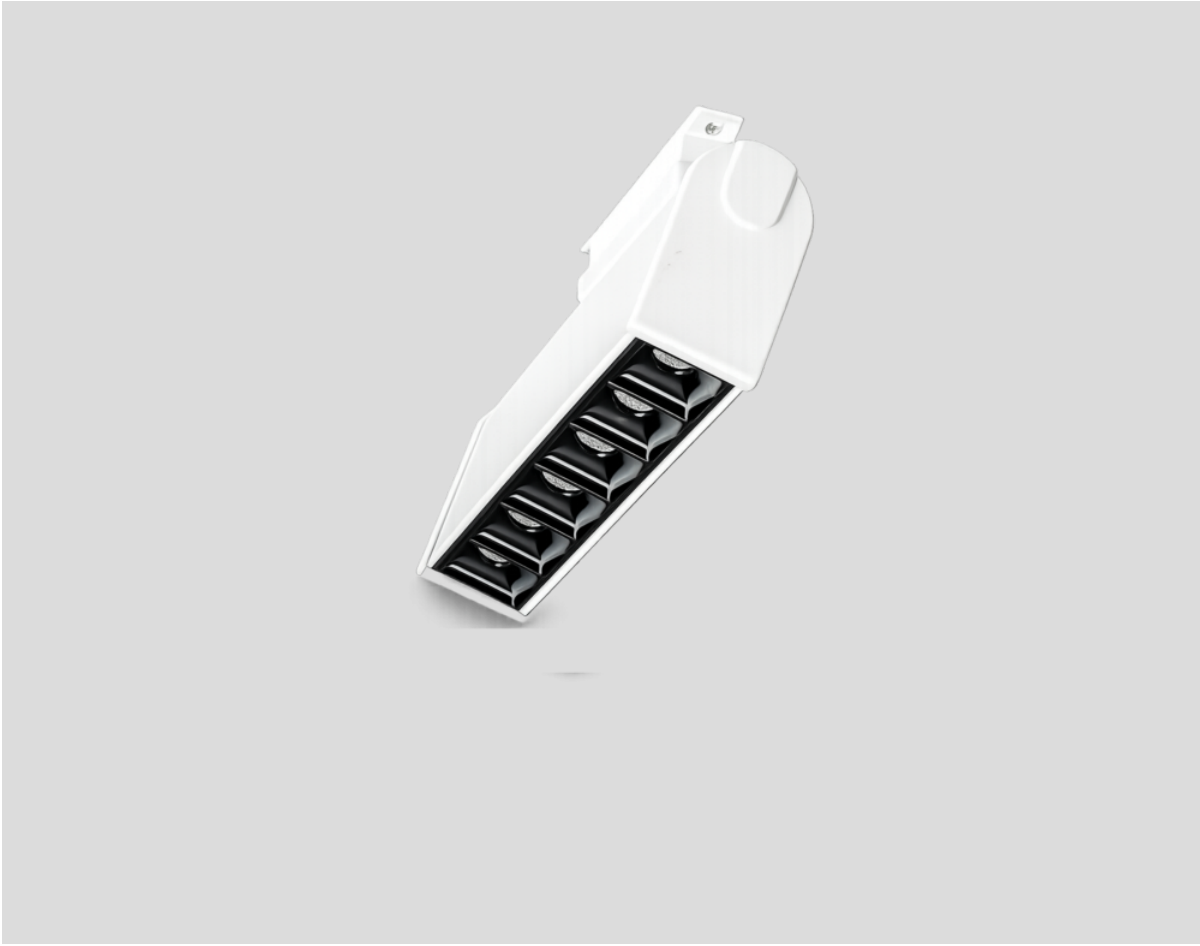


DUET-T

01199

Minimal Design, Controlled Lighting

Duet-T is our linear spot lighting solution developed for surface-mounted applications. Thanks to its multi-cell optical structure and anti-glare reflector, it provides visual comfort with $UGR \leq 16$, minimizing glare. With its controlled light distribution and modern design, it offers an aesthetic and high-performance solution for both general and accent lighting in offices, shops, showrooms, galleries, and other architectural interior spaces.

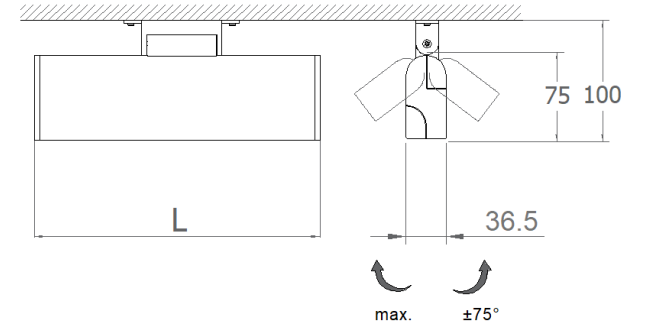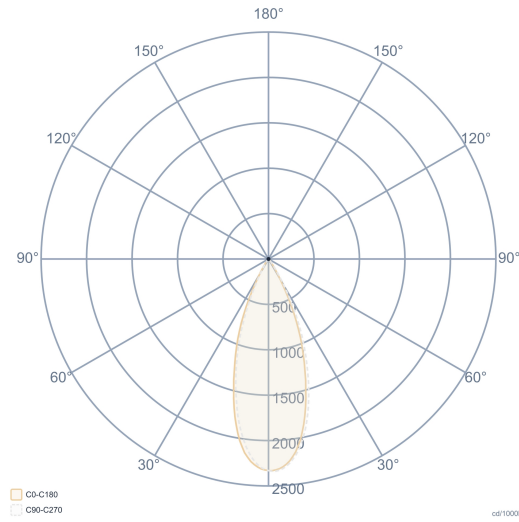

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extrusion Profile	Power	22W-33W	Light Output Angle	36°
Side Cover	Aluminum Injection	Power Factor	>0.95	UGR Value	UGR ≤ 16
Optics	PMMA Lens + Reflector	Light Source	High Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Coating	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Product Dimensions [mm]	280/430(W) x 36(L) x 100(H)	LED Driver	Constant Current		
Mounting Type	Surface	Ambient Temperature	-20°C / +50°C		
Mounting Part	Metal Bracket	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	Angle	CCT	WxLxH (mm)	Kg
01199.37.30.021	22	1840	36°	3000	280x36x100	0,70
01199.37.40.022	22	2040	36°	4000	280x36x100	0,70
01199.37.30.036	33	2760	36°	3000	430x36x100	1,10
01199.37.40.038	33	3060	36°	4000	430x36x100	1,10

