


STAR MINI


05110

Star Mini is a downlight solution developed for modern interiors, with its compact dimensions and efficient optical structure. Its minimalist design creates a simple look on the ceiling while providing comfortable lighting throughout the space with homogeneous light distribution. The extruded aluminum profile body and aluminum injection frame ensure effective heat management, offering long-lasting use. With light angle options of 40°-72°, it is suitable for different application needs. Class-II electrical protection provides additional safety.

Thanks to its Ø119 mm compact body, it can be easily used in offices, hotels, corridors, shops, residential projects, and social areas. It combines aesthetic appearance with high performance in a small size.

RAL 9016 RAL 9005 RAL 9006

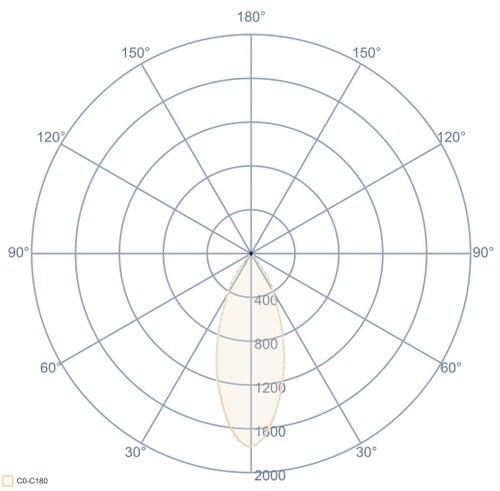



General Information	
Housing	Aluminum Extruded
Frame	Aluminum Injection
Optics	Polished Reflector
Paint	Electrostatic Powder Coating
Insulation Class	Class II
Product Dimensions [mm]	Ø119x108(H)
Mounting Type	Recessed
Mounting Part	Steel Spring

Electrical Info	
Power	13-39W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	40°,72°
UGR Value	UGR < 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05110.11.30.014	13	1500	40°,72°	3000	Ø119x108	Ø106	0,60
05110.11.40.015	13	1550	40°,72°	4000	Ø119x108	Ø106	0,60
05110.11.30.023	20	2330	40°,72°	3000	Ø119x108	Ø106	0,60
05110.11.40.024	20	2450	40°,72°	4000	Ø119x108	Ø106	0,60
05110.11.30.027	24	2680	40°,72°	3000	Ø119x108	Ø106	0,60
05110.11.40.028	24	2780	40°,72°	4000	Ø119x108	Ø106	0,60
05110.11.30.036	32	3680	40°,72°	3000	Ø119x108	Ø106	0,60
05110.11.40.037	32	3780	40°,72°	4000	Ø119x108	Ø106	0,60
05110.11.30.042	39	4275	40°,72°	3000	Ø119x108	Ø106	0,60
05110.11.40.043	39	4375	40°,72°	4000	Ø119x108	Ø106	0,60

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com