


STAR MINI

05110

Star Mini is a downlight solution developed for modern interiors, with its compact dimensions and efficient optical structure. Its minimalist design creates a simple look on the ceiling while providing comfortable lighting throughout the space with homogeneous light distribution. The extruded aluminum profile body and aluminum injection frame ensure effective heat management, offering long-lasting use. With light angle options of 40°-72°, it is suitable for different application needs. Class-II electrical protection provides additional safety.

Thanks to its Ø119 mm compact body, it can be easily used in offices, hotels, corridors, shops, residential projects, and social areas. It combines aesthetic appearance with high performance in a small size.

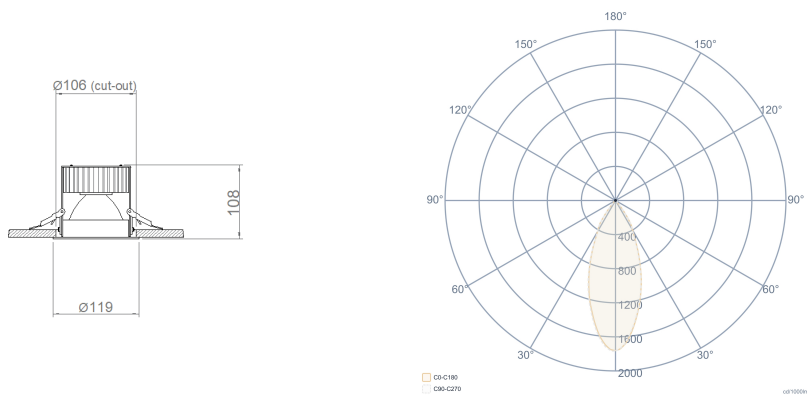

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	13-39W	Light Output Angle	40°,72°
Frame	Aluminum Injection	Power Factor	>0.95	UGR Value	UGR < 22
Optics	Polished Reflector	Light Source	COB LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Coating	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class II	Input Voltage	220-240V AC / 50-60 Hz	Optional	DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit
Product Dimensions [mm]	Ø119x108(H)	LED Driver	Constant Current		
Mounting Type	Recessed	Ambient Temperature	-20°C / +50°C		
Mounting Part	Steel Spring	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05110.11.30.014	13	1500	40°,72°	3000	Ø119x108	Ø106	0,60
05110.11.40.015	13	1550	40°,72°	4000	Ø119x108	Ø106	0,60
05110.11.30.023	20	2330	40°,72°	3000	Ø119x108	Ø106	0,60
05110.11.40.024	20	2450	40°,72°	4000	Ø119x108	Ø106	0,60
05110.11.30.027	24	2680	40°,72°	3000	Ø119x108	Ø106	0,60
05110.11.40.028	24	2780	40°,72°	4000	Ø119x108	Ø106	0,60
05110.11.30.036	32	3680	40°,72°	3000	Ø119x108	Ø106	0,60
05110.11.40.037	32	3780	40°,72°	4000	Ø119x108	Ø106	0,60
05110.11.30.042	39	4275	40°,72°	3000	Ø119x108	Ø106	0,60
05110.11.40.043	39	4375	40°,72°	4000	Ø119x108	Ø106	0,60

