

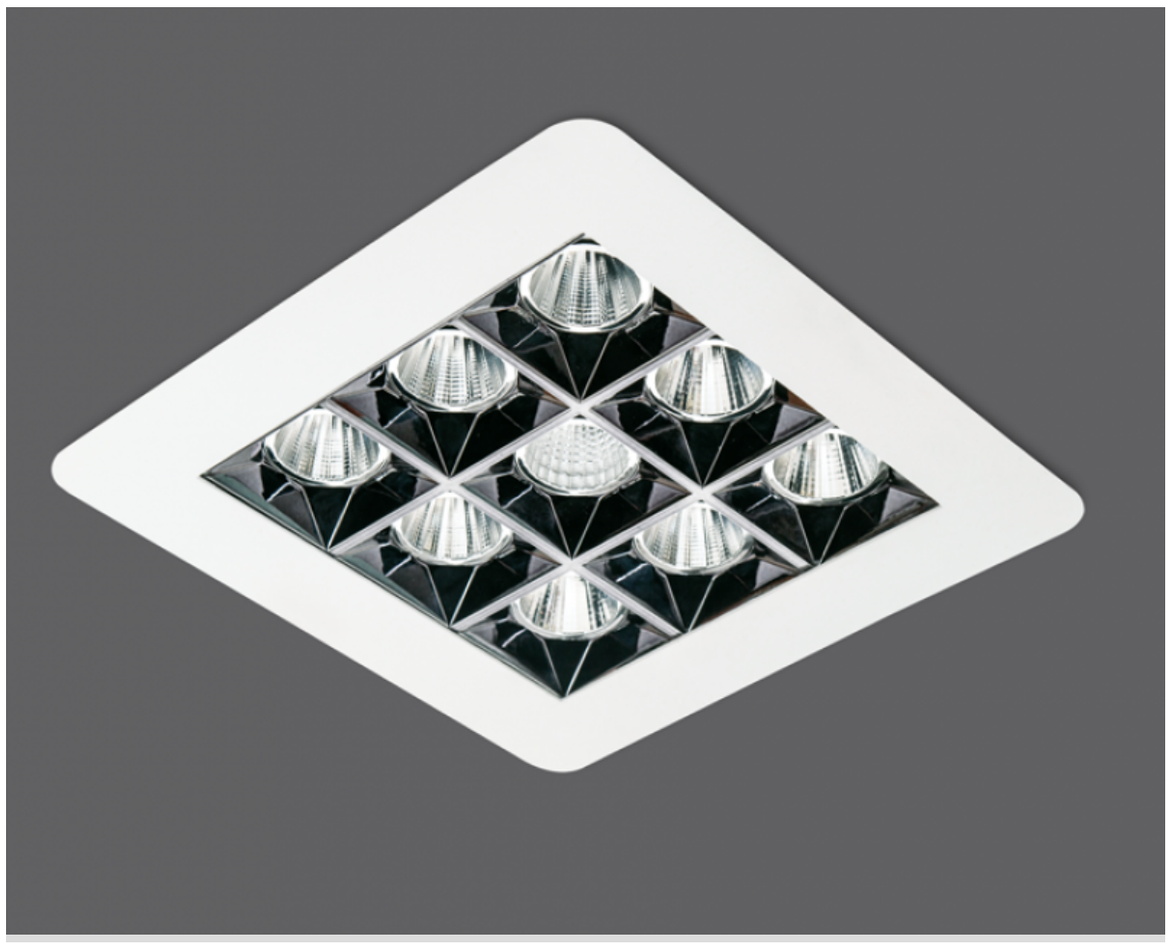


Jewel

05243

RAL 9005 RAL 9006

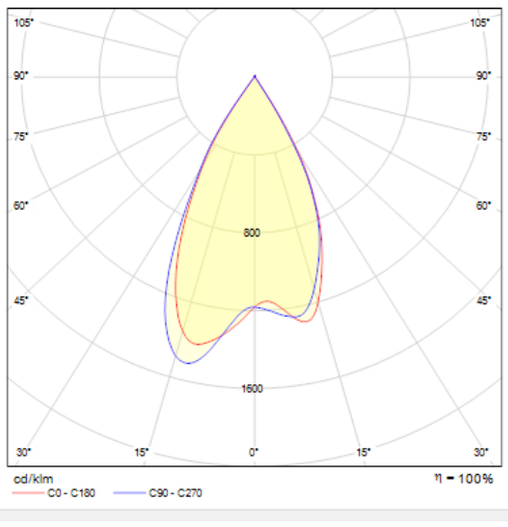

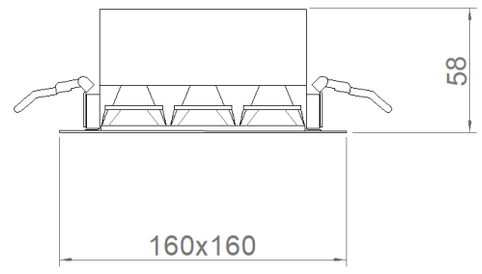

General Information	
Housing	Extruded Aluminum Profile
Frame	
Reflector	Metal sheet
Paint	Anti-Glare Optics

Electrical Info	
Power	32W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Yüksek Verimli Sabit Akım Çıkışlı
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>50.000 Hour

Lighting Technology	
Optics	Symmetrical
Light Output Angle	50°
UGR Value	UGR ≤ 16
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional	
DALI / 1-10V	1-10V DIM
Emergency Lighting Unit	CRI>90 , 2700K~6500K
2700K ~ 6500K	Different RAL Color Optic
Plug-in Energy Input Connector	Class-I Protection Class
AC-DC Supply(MBS)	

Order Code	W	Lm	Angle	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
05243.14.30.030	32	3040	50º	3000	Ra>80	160x160x58	150x150	1,0
05243.14.40.031	32	3520	50º	4000	Ra>80	160x160x58	150x150	1,0

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com