



Corvus-S 600

03170

RAL 9005 RAL 9006

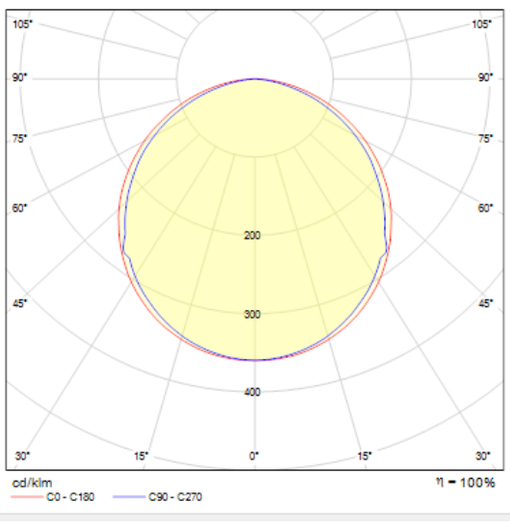

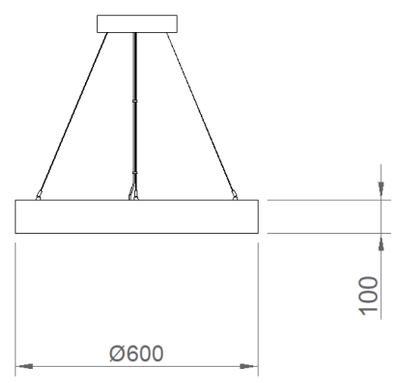

General Information	
Housing	Extruded Aluminum Profile
Diffuser	Highly Transmissive Opal Diffuser
Paint	Electrostatic Powder Paint

Electrical Info	
Power	47W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>50.000 Hour

Lighting Technology	
Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
Tunable White
Emergency Lighting Unit
CRI>90 , 2700K~6500K , Tunable White
2700K ~ 6500K

Order Code	W	Lm	CCT	CRI	ØD x H (mm)	Kg
03170.60.30.044	47	4.600	3000	Ra>80	600x100	3,7
03170.60.40.047	47	4.800	4000	Ra>80	600x100	3,7

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com