

CORVUS-S


03170


The Corvus Series creates a strong and modern look in any space with its solid circular form and simple design language. Thanks to its structure that provides homogeneous light distribution, it offers comfortable lighting while standing out as a decorative design element in architectural projects.

With its aluminum body structure and slim profile details, Corvus offers a minimalist and holistic aesthetic, adapting to contemporary space designs in offices, social areas, and commercial projects.

With pendant, surface-mounted, and recessed mounting options, and various diameter and control choices, custom lighting scenarios can be created for each project.

RAL 9016 RAL 9005 RAL 9006

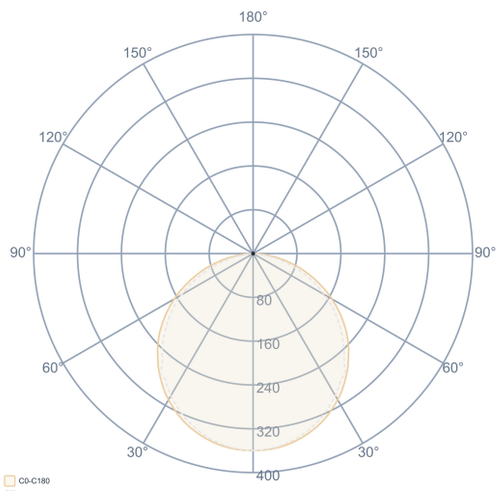

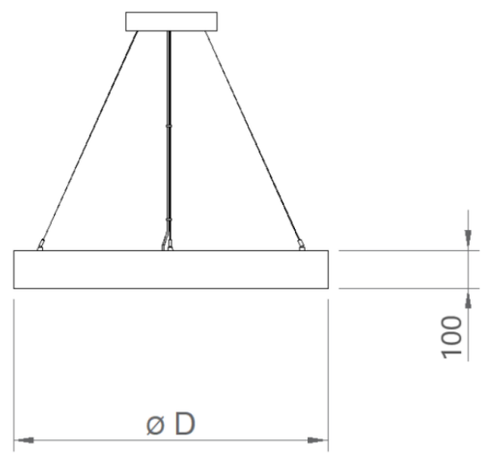

General Information	
Housing	Aluminum Extruded
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø380/500/600/900/1200x100(H)
Mounting Type	Pendant
Mounting Part	Height Adjustable Steel Wire

Electrical Info	
Power	20W-96W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	ØDx(H)	Kg
03170.38.30.021	20	1800	3000	Ø380x100	2,80
03170.38.40.022	20	1900	4000	Ø380x100	2,80
03170.50.30.036	38	3430	3000	Ø500x100	3,50
03170.50.40.039	38	3610	4000	Ø500x100	3,50
03170.60.30.044	47	4600	3000	Ø600x100	3,70
03170.60.40.047	47	4800	4000	Ø600x100	3,70
03170.90.30.107	69	6800	3000	Ø900x100	5,50
03170.90.40.111	69	6900	4000	Ø900x100	5,50
03170.12.30.092	96	9500	3000	Ø1200x100	7,40
03170.12.40.092	96	9600	4000	Ø1200x100	7,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com