





CORVUS-S

03170

The Corvus Series creates a strong and modern look in any space with its solid circular form and simple design language. Thanks to its structure that provides homogeneous light distribution, it offers comfortable lighting while standing out as a decorative design element in architectural projects.

With its aluminum body structure and slim profile details, Corvus offers a minimalist and holistic aesthetic, adapting to contemporary space designs in offices, social areas, and commercial projects.

With pendant, surface-mounted, and recessed mounting options, and various diameter and control choices, custom lighting scenarios can be created for each project.

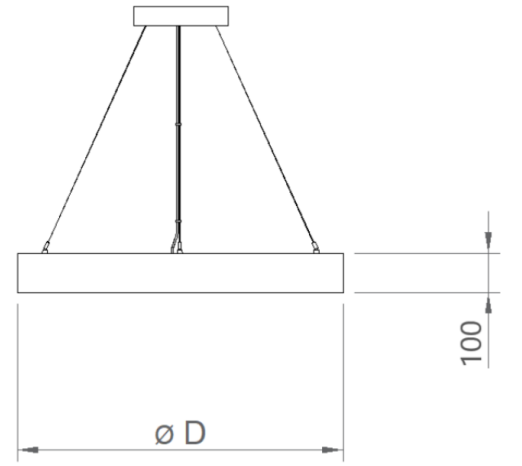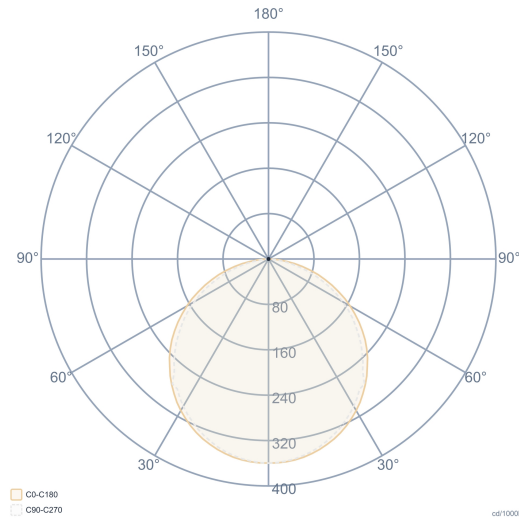

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	20W-96W	Light Output Angle	120°
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	Ø380/500/600/900/1200x100(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Pendant	LED Driver	Constant Current		
Mounting Part	Height Adjustable Steel Wire	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØDx(H)	Kg
03170.38.30.021	20	1800	3000	Ø380x100	2,80
03170.38.40.022	20	1900	4000	Ø380x100	2,80
03170.50.30.036	38	3430	3000	Ø500x100	3,50
03170.50.40.039	38	3610	4000	Ø500x100	3,50
03170.60.30.044	47	4600	3000	Ø600x100	3,70
03170.60.40.047	47	4800	4000	Ø600x100	3,70
03170.90.30.107	69	6800	3000	Ø900x100	5,50
03170.90.40.111	69	6900	4000	Ø900x100	5,50
03170.12.30.092	96	9500	3000	Ø1200x100	7,40
03170.12.40.092	96	9600	4000	Ø1200x100	7,40

