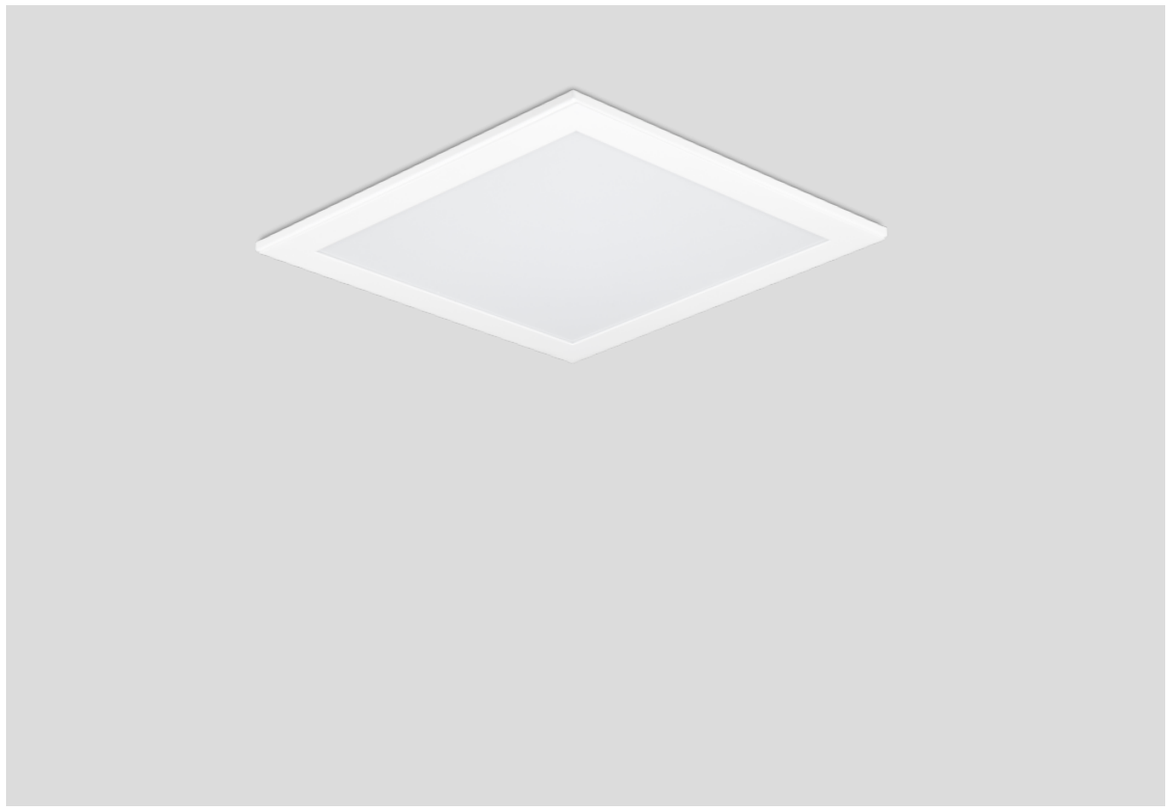


FLAT-G 300


02110


30x30cm Panel Fixture

Flat-G 300 is a compact panel lighting solution developed for modern interiors, featuring a metal sheet housing and flush-mounted design. Its homogeneous light distribution provides comfortable and balanced lighting, while its simple design creates an integrated look with the ceiling surface.

With its 30x30cm dimensions, it offers general lighting, particularly in corridors, offices, educational buildings, healthcare facilities, and commercial areas. Its compact structure allows for flexible use in narrow spaces and modular ceiling applications. With various power, color temperature, and control options, it adapts to project-specific lighting scenarios.

RAL 9016 RAL 9005 RAL 9006

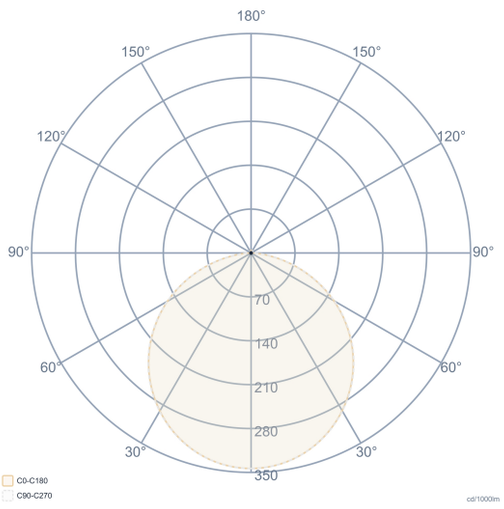

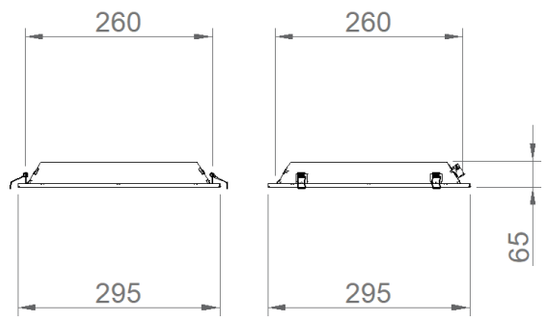

General Information	
Body & Frame	DKP Metal Sheet
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	295(W) x 295(L) x 65(H)
Mounting Type	Recessed
Mounting Part	Steel Spring

Electrical Info	
Power	9-18W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02110.33.30.008	9	750	3000	295x295x65	275x275	1,40
02110.33.40.009	9	840	4000	295x295x65	275x275	1,40
02110.33.30.017	18	1520	3000	295x295x65	275x275	1,40
02110.33.40.018	18	1630	4000	295x295x65	275x275	1,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com