

Flat-C 600

Indoor Lighting - Recessed Lighting



Colour Options



TECHNICAL INFORMATION

Body & Frame Metal Sheet
Diffuser Opal with High Light Transmittance
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 110°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL




Power (W) 28-39W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- AC-DC Supply(MBS)
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Energy Input Connector
- PIR Sensor

ASSEMBLY

Installation Type Clip-in Suspended Ceiling

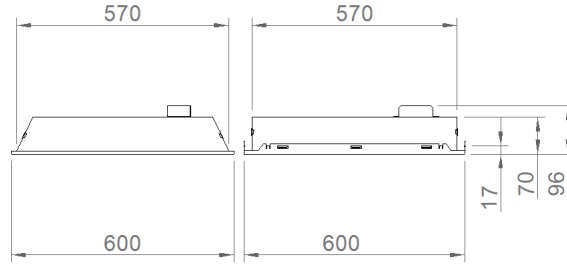

Order Code	W	Light Source	CCT	CRI	WxLxH (mm)	Kg
02110.66.30.031.C	28	3100	3000	Ra>80	600x600x60	2,9
02110.66.40.032.C	28	3300	4000	Ra>80	600x600x60	2,9
02110.66.30.040.C	33	3650	3000	Ra>80	600x600x60	2,9
02110.66.40.041.C	33	3900	4000	Ra>80	600x600x60	2,9
02110.66.30.044.C	39	4300	3000	Ra>80	600x600x60	2,9
02110.66.40.045.C	39	4500	4000	Ra>80	600x600x60	2,9

