



Corvus-G 1200

02130

RAL 9005 RAL 9006

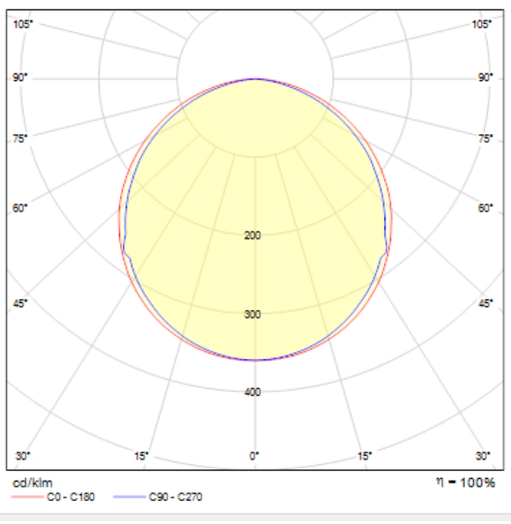

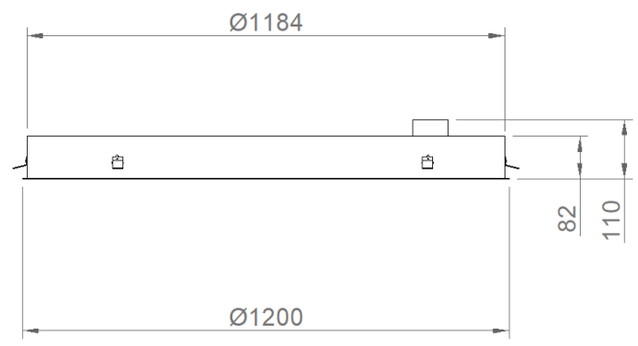

General Information	
Housing	Extruded Aluminum Profile
Diffuser	High Transmittance Opal Diffuser
Paint	Electrostatic Powder Paint

Electrical Info	
Power	96W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>50.000 Hour

Lighting Technology	
Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional	
DALI / 1-10V	1-10V DIM
Tunable White	Emergency Lighting Unit
CRI>90 , 2700K~6500K , Tunable White	2700K ~ 6500K
Different RAL Color Options	Plug-in Connector
Class-I Protection Class	PIR Sensor
AC-DC Supply(MBS)	

Order Code	W	Lm	CCT	CRI	ØD x H (mm)	Cut-out dimensions (mm)	Kg
02130.12.30.092	96	8.665	3000	Ra>80	1200x82	1190	6,8
02130.12.40.097	96	9.120	4000	Ra>80	1200x82	1190	6,8

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com