




CORVUS-G

02130

Circular Recessed Luminaire

Corvus G Series offers a clean and contemporary lighting solution with its solid circular form and recessed mounting structure. Providing uniform and comfortable illumination, it integrates seamlessly with architectural surfaces while maintaining a strong visual identity. Featuring an aluminum body structure and slim profile details, Corvus G delivers a minimal aesthetic that complements contemporary office, commercial and social spaces.

Thanks to our in-house manufacturing capabilities, the Corvus G Series can be produced in various diameters, allowing project-specific solutions beyond standard sizes. With different diameter, color temperature and control options, it offers flexible lighting solutions tailored to architectural concepts and design requirements.

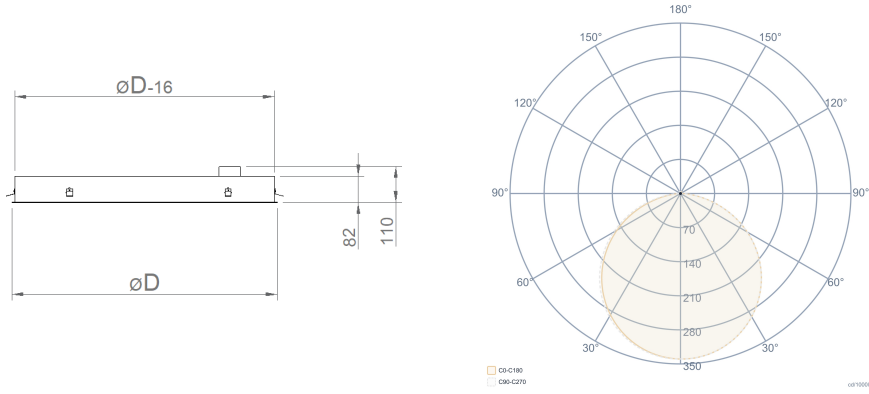

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	20-96	Light Output Angle	120°
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	Ø380/500/600/900/1200x82(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Recessed	LED Driver	Constant Current		
Mounting Part	Metal Bracket	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
02130.12.30.092	96	8665	3000	1200x82	1190	6,80

