


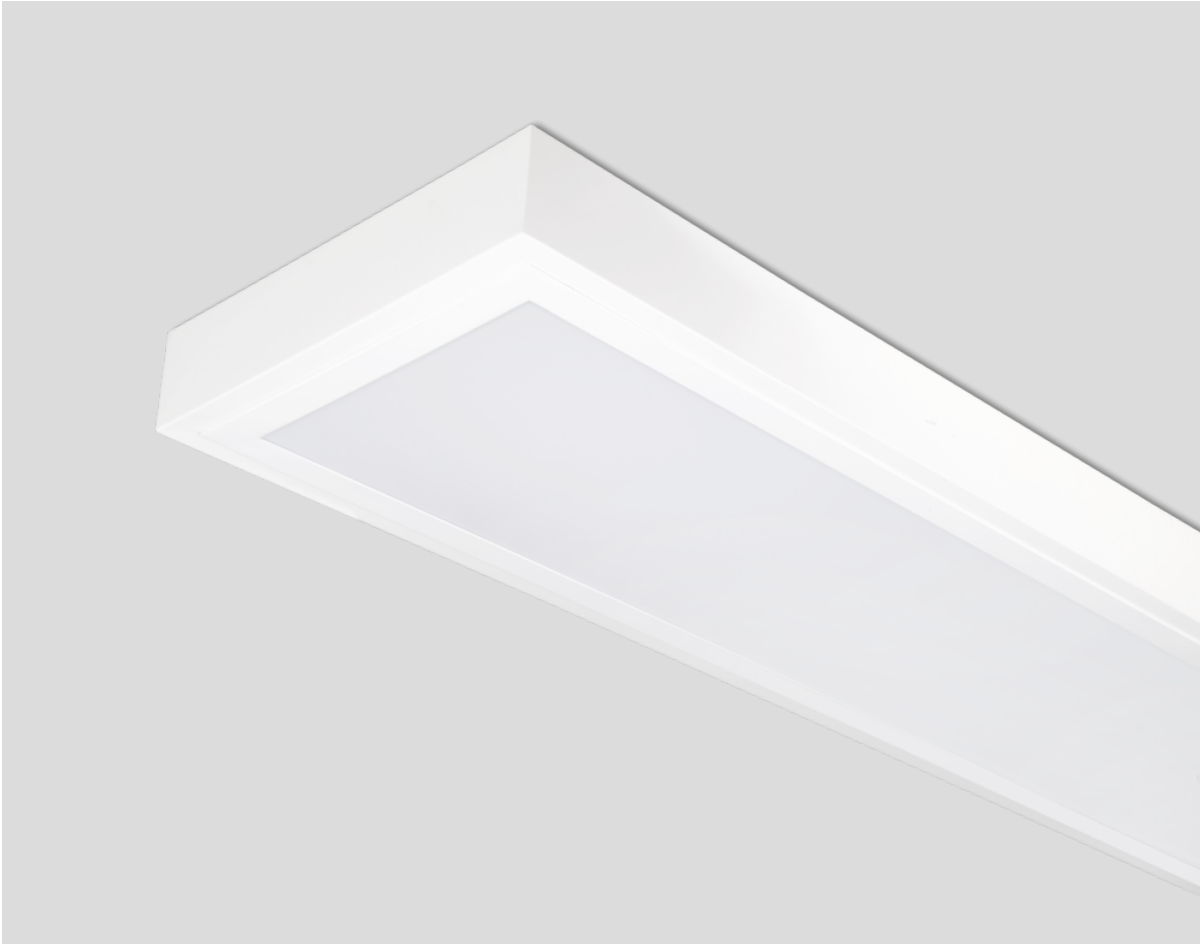



FLAT-T 1230

03135

30x120 Surface Mounted Panel Luminaire

Flat-T 1230 is a professional panel lighting solution developed for special projects, featuring a metal sheet housing and surface mounting. It offers flexible solutions to meet architectural design requirements, thanks to its ability to be produced in custom sizes as well as standard dimensions. Its surface mounting structure provides a practical and aesthetically pleasing alternative in applications where there is no suspended ceiling space.

With its 30x120 cm dimensions, it is particularly preferred in offices, educational buildings, healthcare facilities, commercial areas, and corporate projects. It adapts to project-specific lighting scenarios with various power, color temperature, and control options.

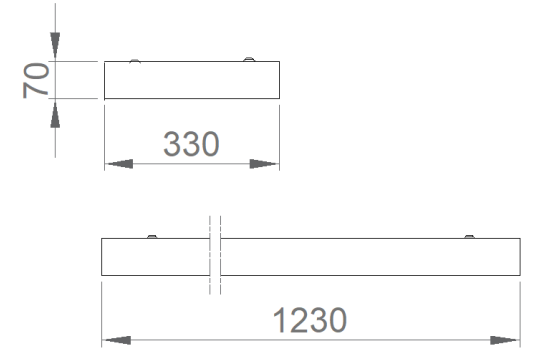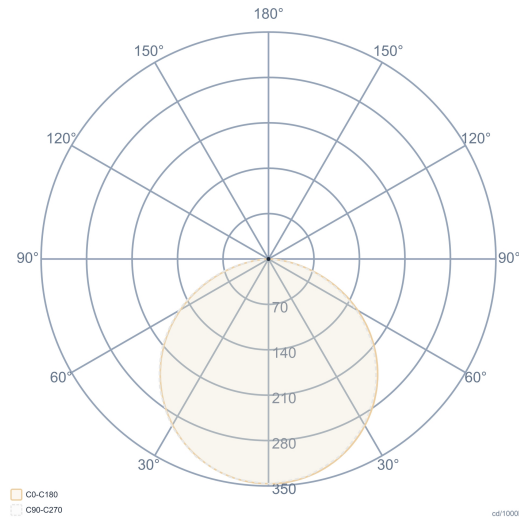

General Information		Electrical Info		Lighting Technology	
Body & Frame	DKP Metal Sheet	Power	28W	Light Output Angle	120°
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	330(W) x 1230(L) x 70(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Surface	LED Driver	Constant Current		
Mounting Part	Screw Dowel Set	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
03135.31.30.032	28	2580	3000	330x1230x70	4,50
03135.31.40.033	28	2710	4000	330x1230x70	4,50

