


ANEMON

05255

Performance in Facade Lighting

Anemon was developed to highlight the aesthetic value of architectural facades. Its slim body, various length options, and optical alternatives make it suitable for many applications, from historical buildings to modern architectural projects. With 10°, 25°, 45°, and 120° light distribution options, it provides narrow-angle accent lighting and wide-surface illumination.

It is compatible with different facade dimensions with length options of 340/650/970/1250 mm. Thanks to its IP67 protection class and IK09 impact resistance, it operates reliably in rain, dust, and harsh outdoor conditions. It is an aesthetic, durable, and high-performance facade lighting solution for building facades, bridges, historical structures, monuments, landscape elements, and architectural surfaces.

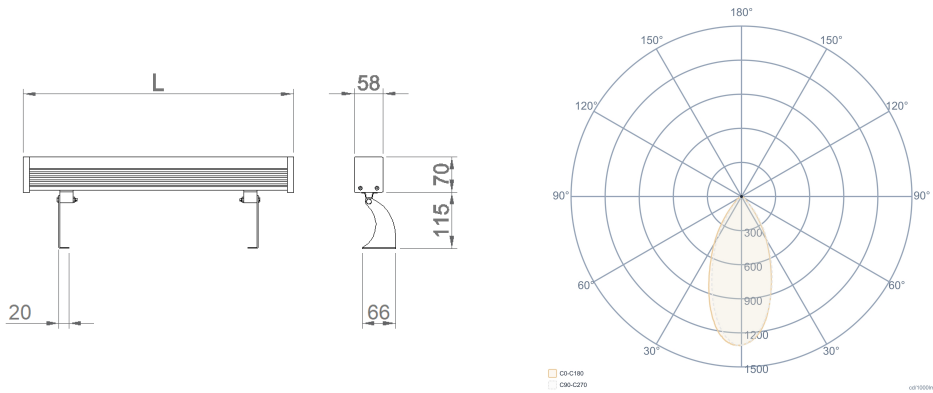

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Extruded	Power	14-55W	Light Output Angle	10°-25°-45°-120°
Side Cover	Aluminum Injection	Power Factor	>0.95	UGR Value	UGR ≤ 25
Glass	Tempered Clear Glass	Light Source	High Power LED	CRI [Ra]	CRI ≥ 80
Gasket	Silicon	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Optics	Acrylic Lens	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Paint	Matte Anodized Finish	LED Driver	Constant Current		
Insulation Class	Class I	Ambient Temperature	-20°C / +50°C		
Product Dimensions [mm]	58(W)x340(L)x70(H)	LED Lifetime L70	>50.000 Hour		
Mounting Type	Surface				

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
05255.12.30.060	55	6050	3000	58x1250x70	5,60

