



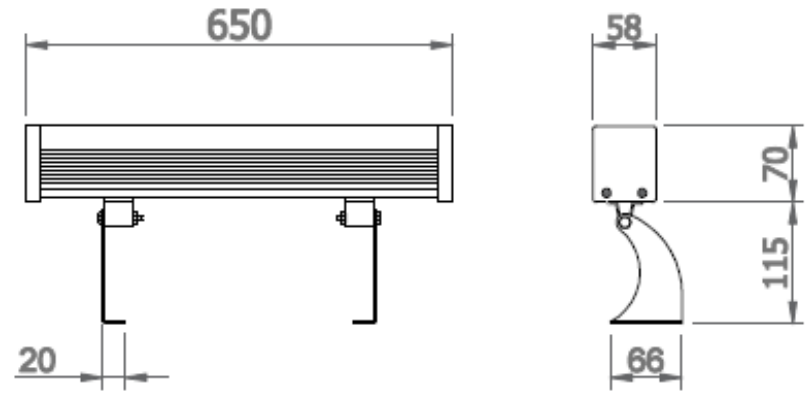

Anemon-650

05255

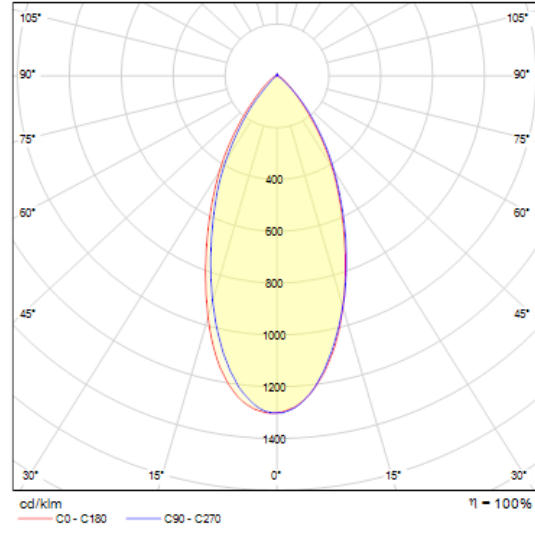

General Information		Electrical Info		Lighting Technology	
Housing	Extruded Aluminum Profile	Power	29W	Light Distribution	Symmetrical
Frame	Matte Anodized Finish	Power Factor	>0.95	Light Output Angle	10°-25°-45°-120°
Glass	Tempered Clear Glass	Light Source	High Power LED	UGR Value	UGR ≤ 25
Reflector	Acrylic Optical Lens	Cabling	Halogen-Free	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
		LED Driver	High Efficiency Constant Current Output		
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		
Optional					
DALI / 1-10V				1-10V DIM	
Tunable White				Emergency Lighting Unit	
2700K ~ 6500K				CRI>90 , 2700K~6500K	
Different RAL Color Options				Plug-in Connector	
Class-I Protection Class				AC-DC Supply(MBS)	

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
05255.65.30.030	29	3120	3000	Ra>80	58x650x70	2,9
05255.65.40.030	29	3230	4000	Ra>80	58x650x70	2,9

