



Anemon-970

05255

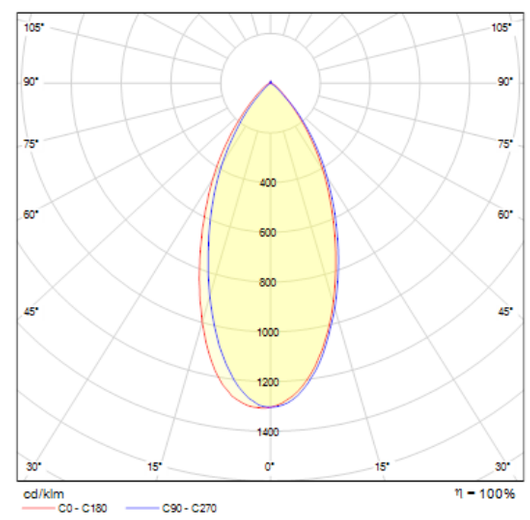

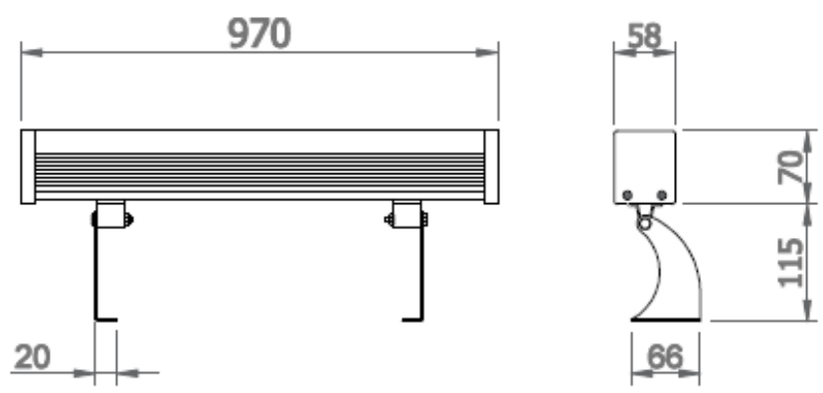

General Information	
Housing	Extruded Aluminum Profile
Frame	Matte Anodized Finish
Glass	Tempered Clear Glass
Reflector	Acrylic Optical Lens
Paint	Electrostatic Powder Paint

Electrical Info	
Power	43W
Power Factor	>0.95
Light Source	Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>50.000 Hour

Lighting Technology	
Light Distribution	Symmetrical
Light Output Angle	10°-25°-45°-120°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional	
DALI / 1-10V	1-10V DIM
Tunable White	Emergency Lighting Unit
2700K ~ 6500K	CRI>90 , 2700K~6500K
Different RAL Color Options	Plug-in Connector
Class-I Protection Class	AC-DC Supply(MBS)

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
05255.97.30.040	43	4730	3000	Ra>80	58x970x70	4,40
05255.97.40.040	43	4860	4000	Ra>80	58x970x70	4,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com