

Potent-F

Outdoor Lighting - Facade Lighting



TECHNICAL INFORMATION

Housing	Die-cast aluminum with electrostatic coating
Optics	Clear optical lens
Glass	Tempered and clear
LED Lifetime	50.000 hours
L80B50	

OPTICAL SPECIFICATIONS

Light Distribution	120°
Light Output Angle	80
UGR Value	80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K

ELECTRICAL



Power (W)	22-86W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

ASSEMBLY

Installation Type Surface Mounted

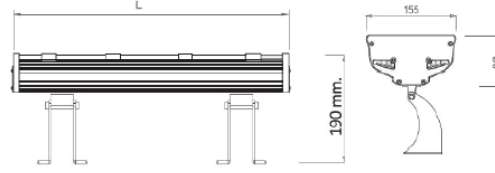

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
07304.02.30.023	22	2350	3000	Ra>80	155x200x80	2,2
07304.02.40.025	22	2500	4000	Ra>80	155x200x80	2,2
07304.03.30.047	43	4700	3000	Ra>80	155x370x80	3,3
07304.03.40.050	43	5000	4000	Ra>80	155x370x80	3,3
07304.07.30.095	86	9500	3000	Ra>80	155x700x80	4,9
07304.07.40.098	86	9800	4000	Ra>80	155x700x80	4,9

