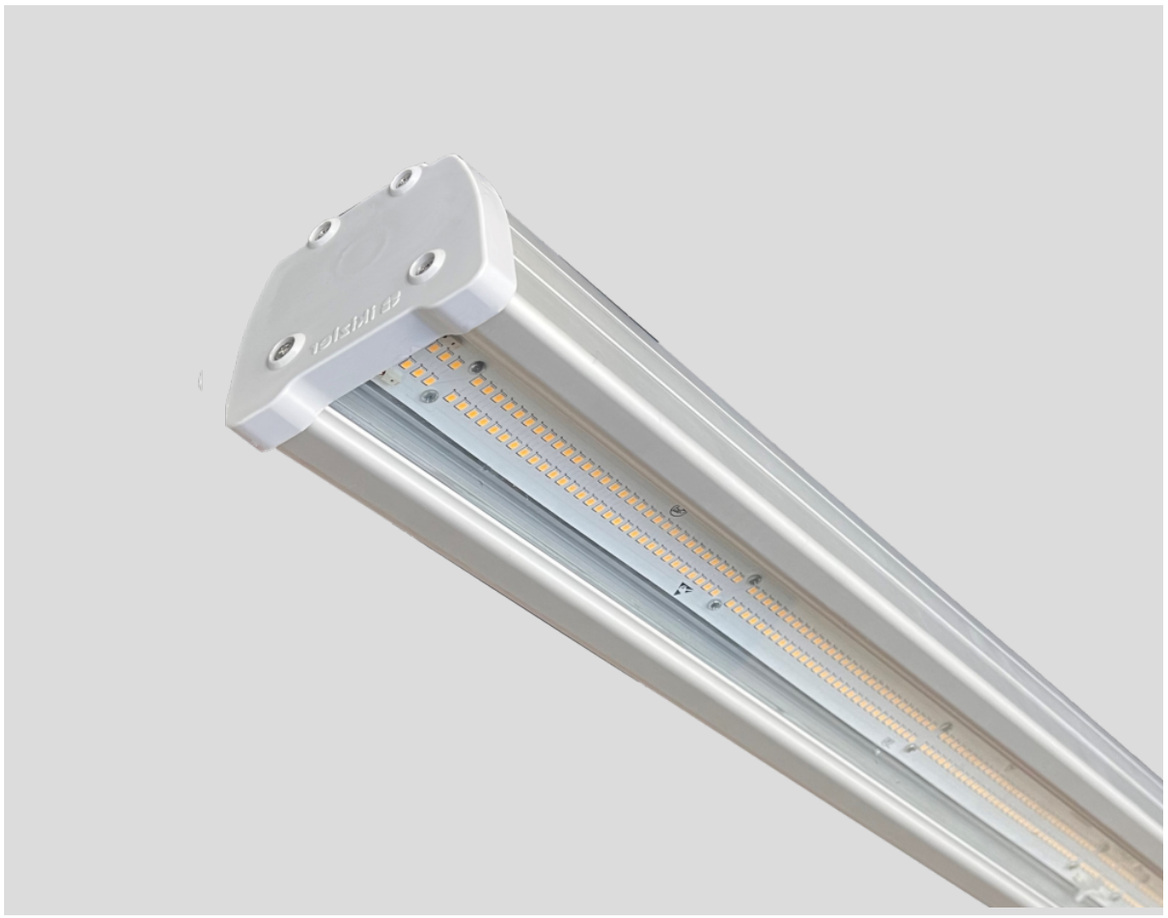


RAL 9006

STRONG


01195

Versatile and Minimalist Industrial Lighting

Strong, with its anodized aluminum body and minimalist design, is developed for industrial and technical areas. Its lensless structure provides a wide and homogeneous light distribution. One of the most striking features of the product is its removable glass structure and concealed mounting details. The screws connecting the glass and body are invisible thanks to the aluminum profiles on the sides. This ensures ease of maintenance while achieving a clean and integrated aesthetic.

The anodized aluminum body offers high corrosion resistance and long-lasting use. Thanks to the special mounting channels on the sides of the body, it is suitable for wall-mounted applications as well as ceiling-mounted applications. It combines functionality, durability, and modern design in production facilities, parking lots, technical rooms, corridors, and industrial areas.

CE | GLOW WIRE 650°C | IP65 | IK08 | RoHS COMPLIANT

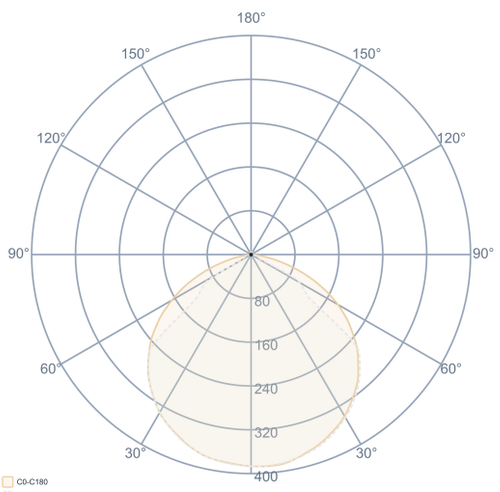



General Information	
Housing	Aluminum Extruded
Side Cover	PC Injection
Diffuser	Clear Tempered Glass + White Reflector
Paint	Anodized Coating
Insulation Class	Class I
Product Dimensions [mm]	92(W)x81(L)x870/1150/1430(H)
Mounting Type	Surface and Pendant
Mounting Part	Metal Bracket

Electrical Info	
Power	81-133W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxHxL (mm)	Kg
01195.99.40.110	81	11295	4000	92x81x870	2,00
01195.99.40.150	108	15060	4000	92x81x1150	2,70
01195.99.40.180	133	18545	4000	92x81x1430	3,30

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com