


Epic

Indoor Lighting - Spot Lighting



Colour Options

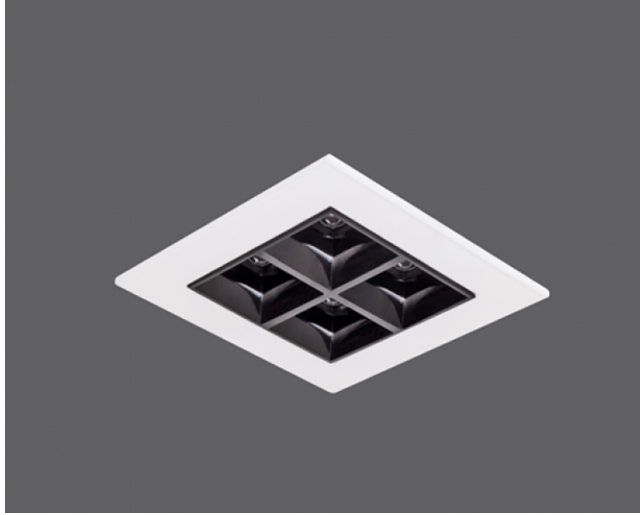

Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Aluminum Injection
Reflector	Anti-Glare Optics
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	80°
UGR Value	UGR ≤ 19
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	10-20W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Yüksek Verimli Sabit Akım Çıkışlı
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-I Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Under Plaster
Mounting	Steel Spring
Apparatus	

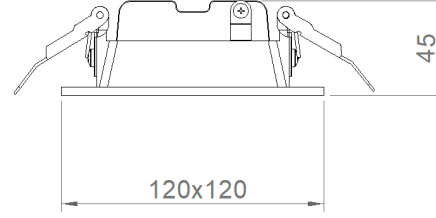

Order Code	W	Lm	Angle	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)
05246.11.30.009	10	920	80°	3000	Ra>80	120x120x45	100x100
05246.11.40.010	10	1180	80°	4000	Ra>80	120x120x45	100x100
05246.11.30.018	20	1800	80°	3000	Ra>80	120x120x45	100x100
05246.11.40.021	20	2100	80°	4000	Ra>80	120x120x45	100x100

