


# Epic

Indoor Lighting - Spot Lighting



## Colour Options

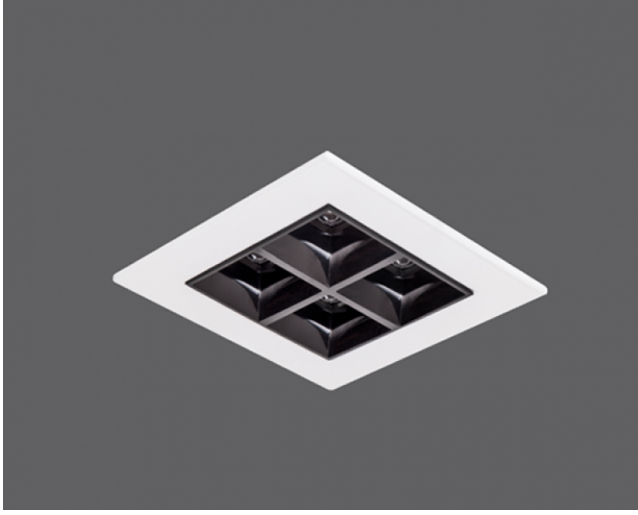

## TECHNICAL INFORMATION

<b>Housing</b>	Aluminum Injection
<b>Reflector</b>	Anti-Glare Optics
<b>Paint</b>	Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Symmetrical
<b>Light Output Angle</b>	80°
<b>UGR Value</b>	UGR ≤ 19
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL



<b>Power (W)</b>	10-20W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabbling</b>	Halojen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	Yüksek Verimli Sabit Akım Çıkışlı
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-I Protection Class	- AC-DC Supply(MBS)

## ASSEMBLY

<b>Installation Type</b>	Under Plaster
<b>Mounting</b>	Steel Spring
<b>Apparatus</b>	

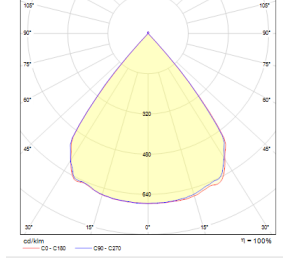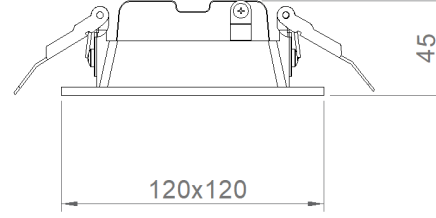

Order Code	W	Lm	Angle	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)
05246.11.40.010	10	1180	80°	4000	Ra>80	120x120x45	100x100

