

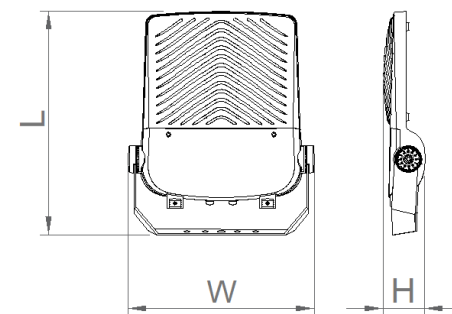


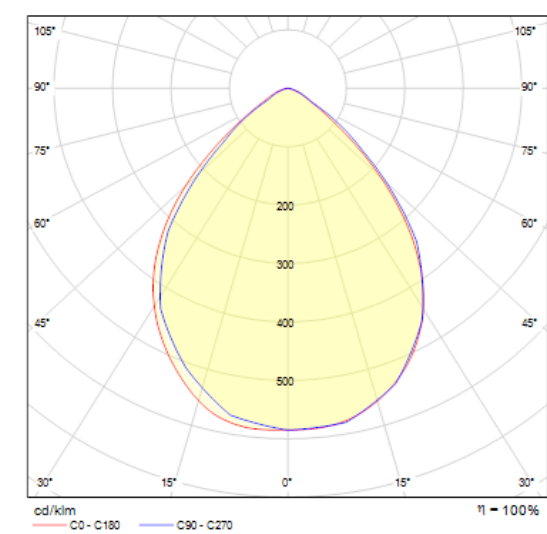

RAL 7016

SCOPE
09394



General Information		Electrical Info		Lighting Technology	
Housing	Die-cast Aluminum Body	Power	70-260W	Light Distribution	Symmetrical
Optics	Acrylic Optical Lens for Projector/Tunnel Lighting	Power Factor	>0.95	Light Output Angle	50°-25°
		Light Source	SMD High Power LED	UGR Value	UGR ≤ 25
Glass	Tempered, Clear Glass Diffuser	Cabling	Halogen-Free	CRI [Ra]	CRI ≥ 70
Paint	Electrostatic Powder Paint	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Mounting Type	Surface	LED Driver	High Efficiency Constant Current Output	Optional	
Mounting Part	Metal Console	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50,000 Hour	DALI / 1-10V	
				1-10V DIM	
				Tunable White	
				Emergency Lighting Unit	
				CRI>90 , 2700K~6500K , Tunable White	
				2700K ~ 6500K	
				Different RAL Color Options	
				Plug-in Connector	
				Class-I Protection Class	
				AC-DC Supply(MBS)	

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
09394.44.40.084	70	9650	4000	Ra>70	400x490x90	8,90
09394.44.40.120	100	12700	4000	Ra>70	400x490x90	8,90
09394.44.40.156	130	15600	4000	Ra>70	400x490x90	8,90
09394.44.40.198	165	20830	4000	Ra>70	400x490x90	8,90
09394.44.40.240	200	24000	4000	Ra>70	490x600x100	13,60
09394.44.40.288	240	28800	4000	Ra>70	490x600x100	13,60
09394.44.40.312	260	34830	4000	Ra>70	490x600x100	13,60

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K. Katalogta ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.