


RAL 7016

SCOPE

09394

IK 08 | RoHS COMPLIANT | IP 66

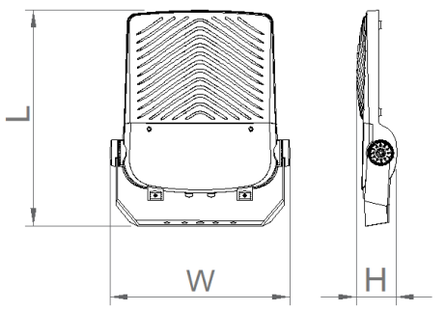

General Information	
Housing	Die-cast Aluminum Body
Optics	Acrylic Optical Lens for Projector/Tunnel Lighting
Glass	Tempered, Clear Glass Diffuser
Paint	Electrostatic Powder Paint
Mounting Type	Surface
Mounting Part	Metal Console

Electrical Info	
Power	70-260W
Power Factor	>0.95
Light Source	SMD High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>50.000 Hour

Lighting Technology	
Light Distribution	Symmetrical
Light Output Angle	50°-25°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 70
Color Bin Value	Mc Adams ≤ 3

Optional	
DALI / 1-10V	1-10V DIM
Tunable White	Emergency Lighting Unit
CRI>90 , 2700K~6500K , Tunable White	2700K ~ 6500K
Different RAL Color Options	Plug-in Connector
Class-I Protection Class	AC-DC Supply(MBS)

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
09394.44.40.084	70	9650	4000	Ra>70	400x490x90	8,90
09394.44.40.120	100	12700	4000	Ra>70	400x490x90	8,90
09394.44.40.156	130	15600	4000	Ra>70	400x490x90	8,90
09394.44.40.198	165	20830	4000	Ra>70	400x490x90	8,90
09394.44.40.240	200	24000	4000	Ra>70	490x600x100	13,60
09394.44.40.288	240	28800	4000	Ra>70	490x600x100	13,60
09394.44.40.312	260	34830	4000	Ra>70	490x600x100	13,60

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com