


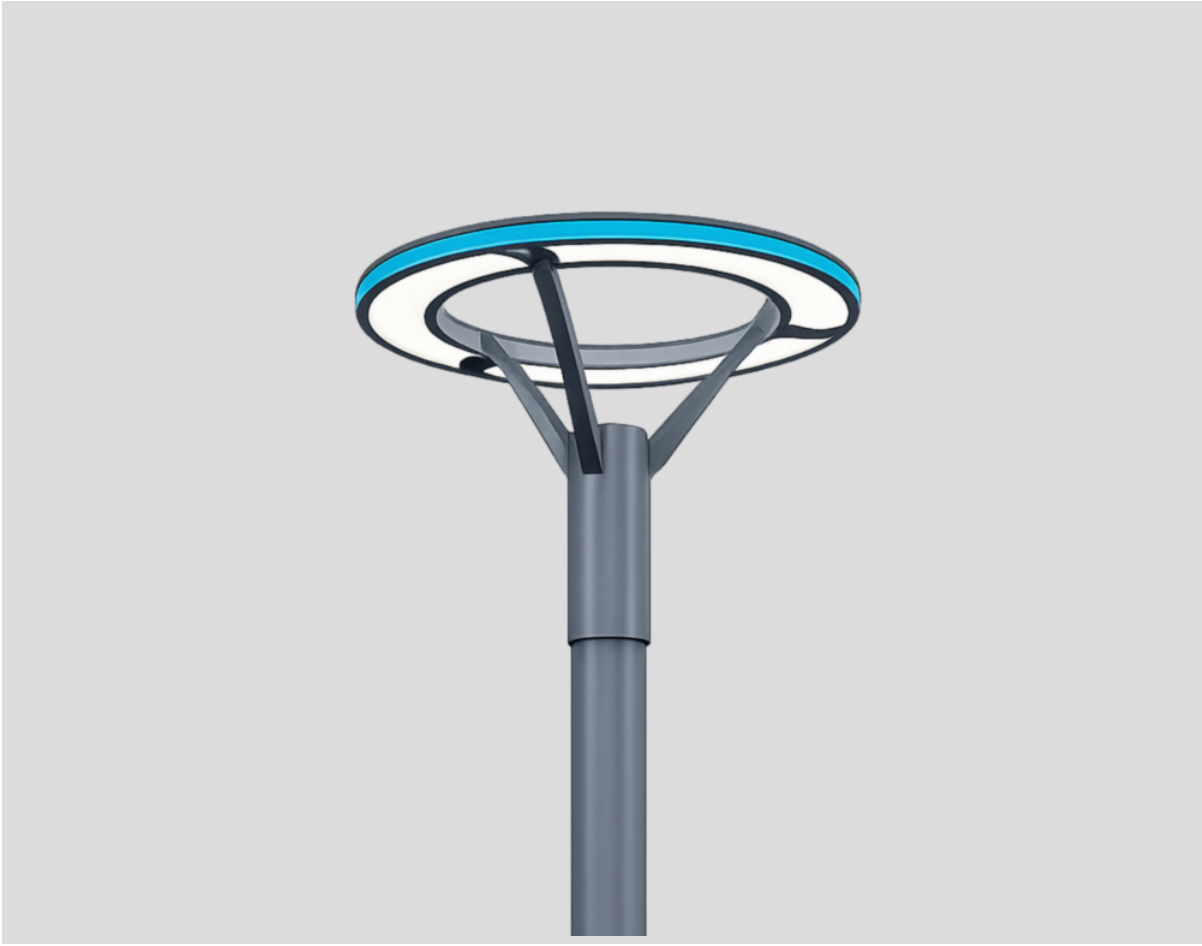


ALFOT


09494

Modern Design, Homogeneous Lighting

Alfot is our environmental lighting solution developed for parks, walkways, squares, campuses, and landscaped areas, featuring a modern design and homogeneous light distribution. Its 120° wide light distribution enhances visual comfort, while its IP65 protection class, IK08 impact resistance, and corrosion-resistant aluminum housing ensure long-lasting and reliable use in outdoor conditions. Its unique ring shape gives environmental lighting a modern and aesthetic identity, while its high performance adds value to your projects.



RAL 7016

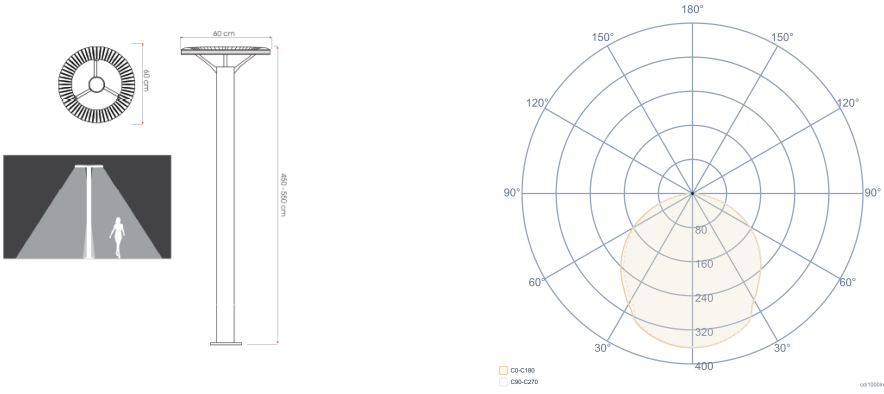

General Information		Electrical Info		Lighting Technology	
Body & Frame	Corrosion Resistant Cast Aluminum	Power	40-75W	Light Output Angle	120°
Optics	Opal lens	Power Factor	>0.95	UGR Value	UGR ≤ 25
Paint	Electrostatic Powder Paint	Light Source	High Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	Ø600x3500-4000-6000	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Surface	LED Driver	Constant Current		
		Ambient Temperature	-30°C / +60°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØDx(H)
09494.63.60.042	40	4080	6000	Ø600x3500
09494.64.60.075	60	7190	6000	Ø600x4000
09494.65.60.089	75	8560	6000	Ø600x5000

