



RAL 7016



ANTHILL-B

09333

Elegant Ambient Lighting

Anthill-B is a decorative bollard lighting solution we developed for walkways, parks, gardens, landscapes, and building surroundings, with its modern cylindrical form and compact design. Thanks to its symmetrical and asymmetrical optical options, it provides light distribution suitable for different application needs, creating safe and visually comfortable outdoor spaces.

Its corrosion-resistant housing, IP65 protection class, and IK08 impact resistance offer long-lasting and reliable performance in challenging outdoor conditions. Combining simple design with aesthetic appeal and high durability, it adds value to modern environmental projects.

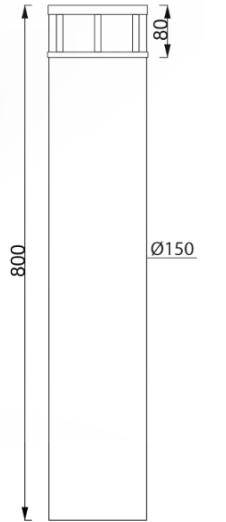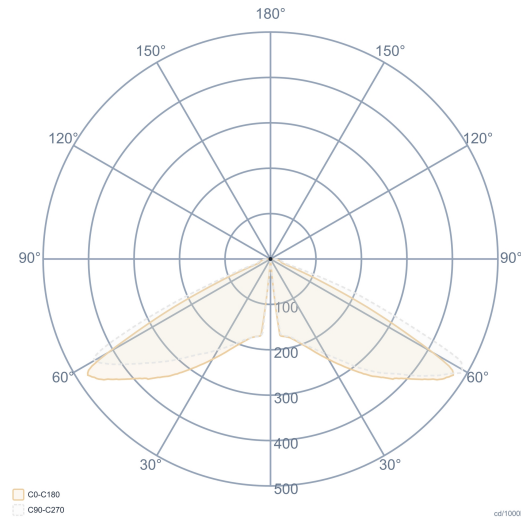

General Information		Electrical Info		Lighting Technology	
Housing	Corrosion Resistant Cast Aluminum	Power	9W	Light Output Angle	2x25°
Paint	Electrostatic Powder Paint	Power Factor	>0.95	UGR Value	UGR ≤ 25
Insulation Class	Class I	Light Source	High Power LED	CRI [Ra]	CRI ≥ 70
Product Dimensions [mm]	Ø150x800mm	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Mounting Type	Surface	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
		LED Driver	Constant Current		
		Ambient Temperature	-30°C / +60°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØDx(H)
09333.18.60.009	9	940	6000	Ø150x800

