

Panoramic-B

Outdoor Lighting - Urban Lighting



Colour Options



Ral 9005

TECHNICAL INFORMATION

Housing	Corrosion Resistant Aluminum
Paint	Electrostatic Powder Paint
Optics	High UV Resistant PMMA Lens

OPTICAL SPECIFICATIONS

Optics	Symmetrical / Asymmetrical
Light Output Angle	25°
UGR Value	UGR ≤ 25
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	14-22W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-30°C / +60°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- 2700K ~ 6500K	- CRI > 90
- Different RAL Color Options	- Plug-in Connector
- Class-I Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted

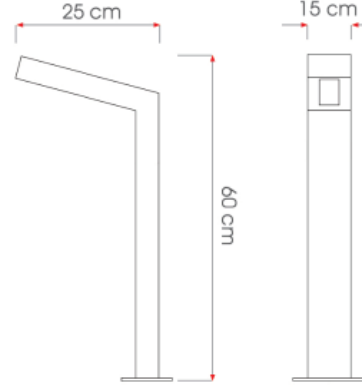

Order Code	W	Lm	CCT	CRI
09334.26.60.018	14	1760	6000	Ra>70
09334.26.60.028	22	2770	6000	Ra>70

