



RAL 9005



## POINT

### 09397

#### Outdoor Facade Projector

Point is designed to provide long-distance and controlled lighting for architectural facades, monumental structures, bridges, and landscape applications. Thanks to its robust optical structure and various light distribution options, it creates a high visual impact while highlighting architectural details. Its corrosion-resistant aluminum housing, IP66 protection class, and suitability for harsh outdoor conditions ensure long-lasting use. With its optical options, it provides solutions for different project needs, from narrow-angle accent lighting to wide surface lighting.

With its highly efficient optical system, robust mechanical structure, and long service life, Point is a reliable and professional facade lighting solution for building facades, historical structures, towers, bridges, landscape areas, and monumental architectural projects.

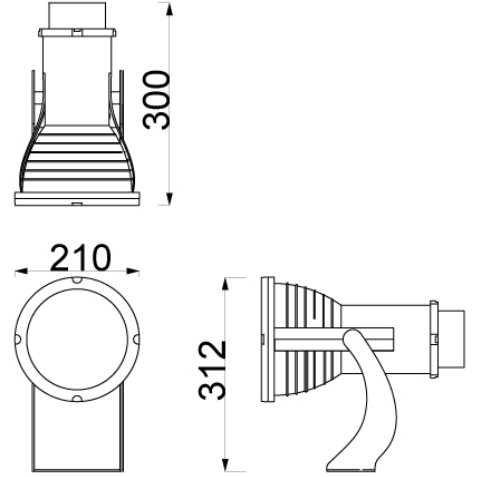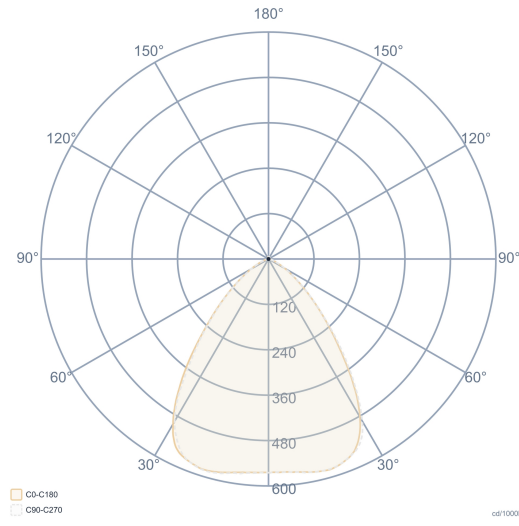

| General Information            |                            | Electrical Info            |                        | Lighting Technology                                                                                |                                    |
|--------------------------------|----------------------------|----------------------------|------------------------|----------------------------------------------------------------------------------------------------|------------------------------------|
| <b>Body &amp; Frame</b>        | Aluminum Injection Molded  | <b>Power</b>               | 40-100W                | <b>Light Output Angle</b>                                                                          | 15°-30°-45°-60°-90°-120°           |
| <b>Glass</b>                   | Tempered Clear Glass       | <b>Power Factor</b>        | >0.95                  | <b>UGR Value</b>                                                                                   | UGR ≤ 25                           |
| <b>Optics</b>                  | Acrylic Lens               | <b>Light Source</b>        | Power LED              | <b>CRI [Ra]</b>                                                                                    | CRI ≥ 70                           |
| <b>Gasket</b>                  | Silicon                    | <b>Cabling</b>             | Halogen-Free           | <b>Color Temperature (CCT)</b>                                                                     | 2700K-4000K-5000K-6000K-Green-Blue |
| <b>Paint</b>                   | Electrostatic Powder Paint | <b>Input Voltage</b>       | 220-240V AC / 50-60 Hz | <b>Color Bin Value</b>                                                                             | Mc Adams ≤ 3                       |
| <b>Insulation Class</b>        | Class I                    | <b>LED Driver</b>          | Constant Current       | <b>Optional</b><br>DALI / 1-10V<br>CRI>90 , 2700K~6500K , Tunable White<br>Emergency Lighting Unit |                                    |
| <b>Product Dimensions [mm]</b> | Ø210x340mm                 | <b>Ambient Temperature</b> | -30°C / +60°C          |                                                                                                    |                                    |
| <b>Mounting Type</b>           | Surface                    | <b>LED Lifetime L70</b>    | >50.000 Hour           |                                                                                                    |                                    |
|                                |                            | <b>Overvoltage</b>         | 6KV-10 KV              |                                                                                                    |                                    |

| Order Code      | W   | Lm    | CCT  | ØD x H (mm) | Angle                    | Kg   |
|-----------------|-----|-------|------|-------------|--------------------------|------|
| 09397.11.60.016 | 40  | 5332  | 6000 | Ø210x340    | 15°-30°-45°-60°-90°-120° | 4,90 |
| 09397.11.60.026 | 60  | 7500  | 6000 | Ø210x340    | 15°-30°-45°-60°-90°-120° | 4,90 |
| 09397.11.60.036 | 75  | 8977  | 6000 | Ø210x340    | 15°-30°-45°-60°-90°-120° | 4,90 |
| 09397.11.60.036 | 75  | 9750  | 6000 | Ø210x340    | 15°-30°-45°-60°-90°-120° | 4,90 |
| 09397.11.60.052 | 100 | 12270 | 6000 | Ø210x340    | 15°-30°-45°-60°-90°-120° | 4,90 |

