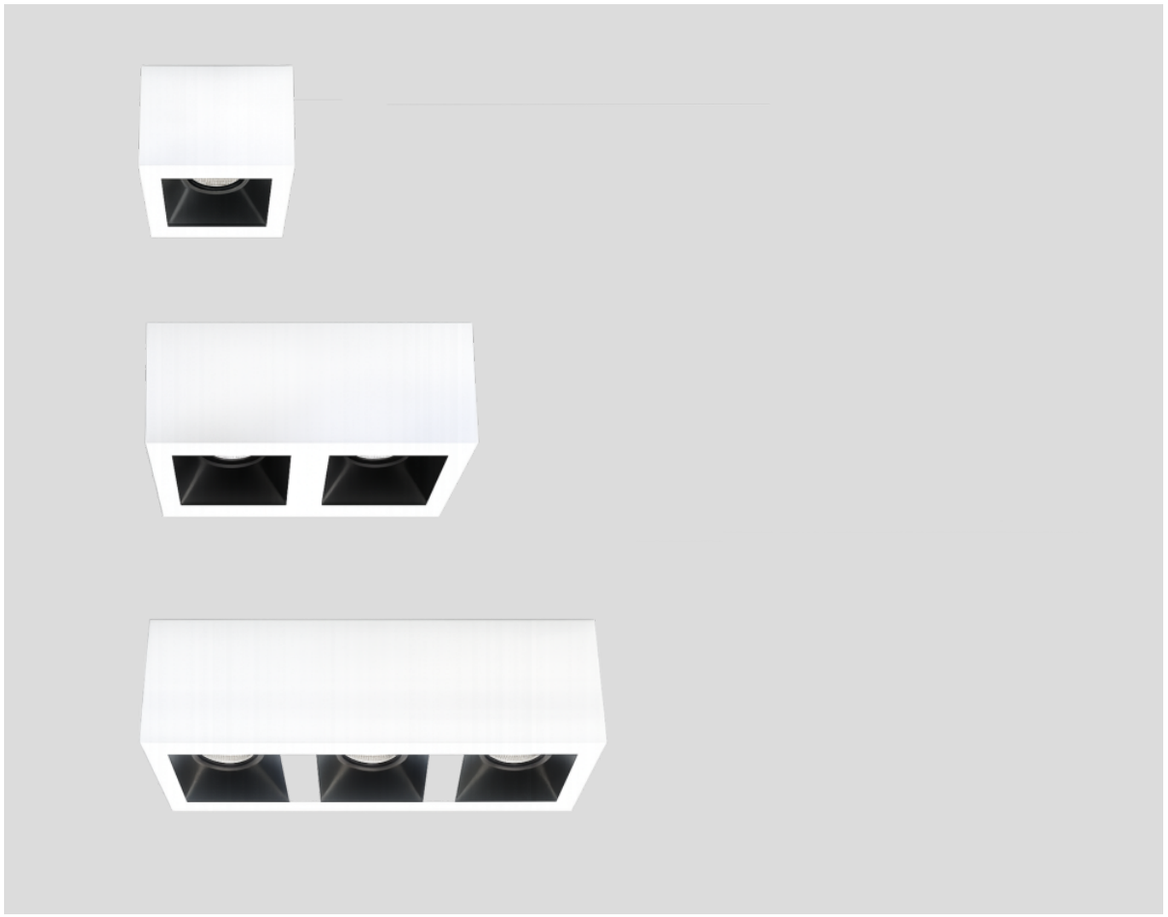


PERLA-SK

05480


Modular Square Surface Mounted Spot Light Luminaire

The PERLA-SK Series is a professional surface-mounted spotlight solution developed for architectural projects, featuring a square-shaped, deep reflector structure and an optical design that provides low glare. Its modern formula, distinctly separated from the ceiling, offers controlled and comfortable lighting while giving the space a strong architectural character.

With single, double, and triple module options (SK1, SK2, and SK3), it provides flexible lighting solutions. Thanks to its modular structure, different light distributions and spatial arrangements can be created while maintaining the same design language.

Available in white and black body alternatives, the PERLA-SK Series adapts to different architectural concepts and can be used in shops, offices, galleries, social areas, and commercial projects for both general and accent lighting applications.

RAL 9016 RAL 9005 RAL 9006

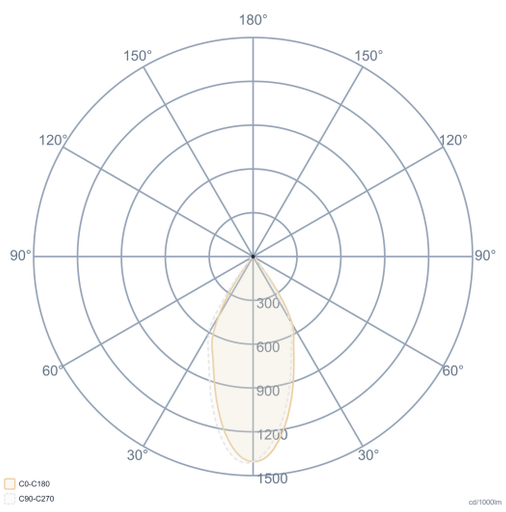



General Information	
Housing	Aluminum Injection
Frame	DKP Metal Sheet
Optics	Polished Reflector
Paint	Electrostatic Powder Coating
Insulation Class	Class II
Product Dimensions [mm]	100(W)x100/200/310(W)x130(H)
Mounting Type	Surface
Mounting Part	Screw Dowel Set

Electrical Info	
Power	11-33W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	35°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Kit

Order Code	W	Lm	Angle	CCT	WxLxH (mm)	Product Type	Kg
05480.11.30.007	11	1020	35°	3000	100x100x130	SK1	1,20
05480.11.40.007	11	1100	35°	4000	100x100x130	SK1	1,20
05480.11.30.020	22	2050	35°	3000	100x200x130	SK2	1,80
05480.11.40.021	22	2150	35°	4000	100x200x130	SK2	1,80
05480.11.30.021	33	3050	35°	3000	100x310x130	SK3	2,40
05480.11.40.023	33	3200	35°	4000	100x310x130	SK3	2,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com