

BLACKLINE


01180


Pendant Lighting Luminaire

The Blackline Series offers high visual comfort with its compact profile structure and reflector-based optical system. Thanks to its dark optical character, it provides low glare UGR≤16 creating comfortable lighting in workspaces.

Its 44,5 mm wide aluminum body and screwless side cover design offer a simple and integrated look. Maintenance and replacement are easily performed thanks to the special spring system within the modular LED structure. Offering project-specific solutions with different light angles and control options, the Blackline adapts to different architectural applications with its pendant and surface mounting alternatives.

RAL 9016 RAL 9005 RAL 9006

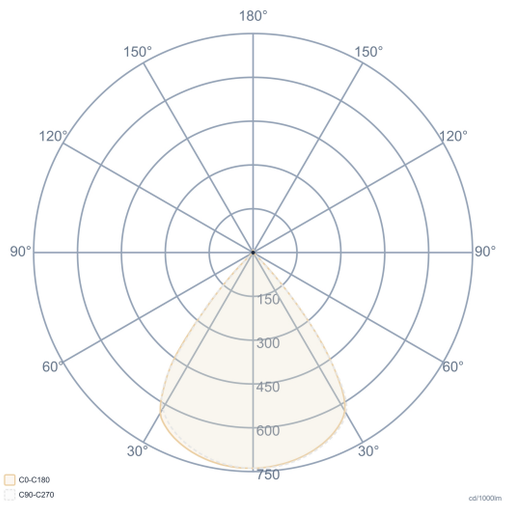

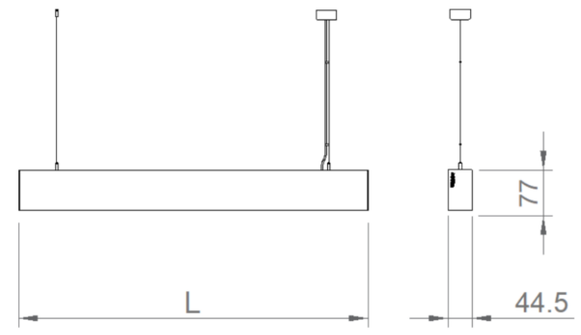

General Information	
Housing	Aluminum Extruded
Side Cover	Aluminum Injection
Optics	PMMA Lens + Reflector
Paint	Electrostatic Powder Painted
Insulation Class	Class I
Product Dimensions [mm]	45(W) x 77(H)
Mounting Type	Pendant
Mounting Part	Height Adjustable Steel Wire

Electrical Info	
Power	11-33W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	80°
UGR Value	UGR≤16
CRI [Ra]	CRI≥80
Color Bin Value	Mc Adams≤3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)	Kg
01180.48.30.016	11	1200	3000	565	1,00
01180.48.40.019	11	1320	4000	565	1,00
01180.48.30.023	16	1800	3000	845	1,40
01180.48.40.026	16	2000	4000	845	1,40
01180.48.30.032	22	2480	3000	1125	1,80
01180.48.40.035	22	2760	4000	1125	1,80
01180.48.30.040	27	2900	3000	1405	2,20
01180.48.40.044	27	3250	4000	1405	2,20
01180.48.30.050	33	3600	3000	1685	2,40
01180.48.40.053	33	4000	4000	1685	2,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com