

# ICON IP65

# 06152


## Round PC Waterproof


The IP65 Icon lighting fixture is a compact, watertight lighting product with a simple design and high level of protection. Its UV-resistant PC injection molded body and opal polycarbonate diffuser offer both durability and visual comfort. With IP65 protection class and IK08 impact resistance, it provides reliable performance in dusty, humid, and harsh environmental conditions. The opal diffuser, which creates homogeneous light distribution, reduces glare, offering a comfortable lighting experience.

It stands out as a long-lasting and economical lighting solution for corridors, stairwells, technical rooms, parking lots, social areas, and general use spaces.

GLOW WIRE 650°C · IP65 · IK08 · RoHS COMPLIANT

RAL 9016

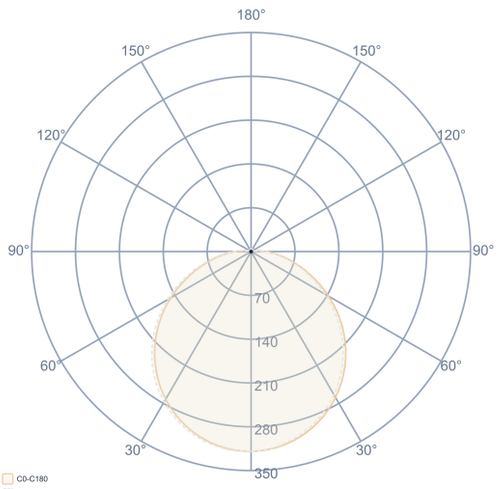

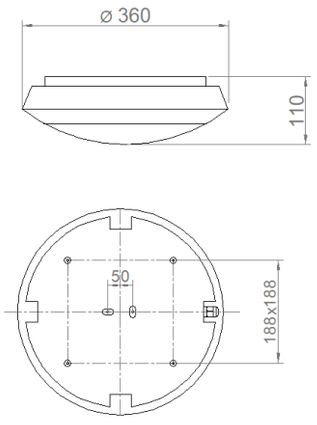
| General Information | |
|---|---|
| **Housing** | UV Additive PC Injection Molding |
| **Optics** | Opal PC Injection |
| **Gasket** | Silicone |
| **Insulation Class** | Class I |
| **Product Dimensions [mm]** | Ø360x 110(H) |
| **Mounting Type** | Surface |
| **Mounting Part** | Screw Dowel Set |

| Electrical Info | |
|---|---|
| **Power** | 13-25W |
| **Power Factor** | >0.95 |
| **Light Source** | SMD LED |
| **Cabling** | Halogen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L70** | >102.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 120° |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Unit |

| Order Code | W | Lm | CCT | ØD x H (mm) | Kg |
|---|---|---|---|---|---|
| 06152.34.30.013 | 13 | 1625 | 3000 | 360x110 | 1,30 |
| 06152.34.40.017 | 13 | 1650 | 4000 | 360x110 | 1,30 |
| 06152.34.30.018 | 18 | 2250 | 3000 | 360x110 | 1,30 |
| 06152.34.40.019 | 18 | 2300 | 4000 | 360x110 | 1,30 |
| 06152.34.30.031 | 25 | 3000 | 3000 | 360x110 | 1,30 |
| 06152.34.40.032 | 25 | 3100 | 4000 | 360x110 | 1,30 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com