


Vera

Indoor Lighting - Appliques



Colour Options

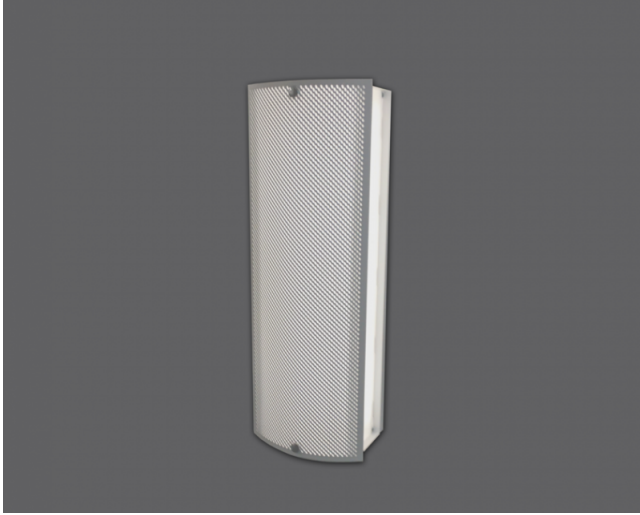

Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Electrostatic Powder Coated DKP Sheet
Diffuser	Perforated Sheet and Opal Lens
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	210°
UGR Value	UGR ≤ 25
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	15-22W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +40°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

DALI
Emergency Lighting Unit
CRI > 90
2700K ~ 6500K
Class-II Protection Class
PIR Sensor

ASSEMBLY

Installation Type Surface Mounted

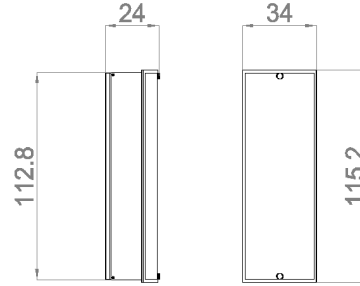

Order Code	W	Lm	CCT	CRI	Kg
06145.14.30.018	22	1720	3000	Ra>80	1,3

