
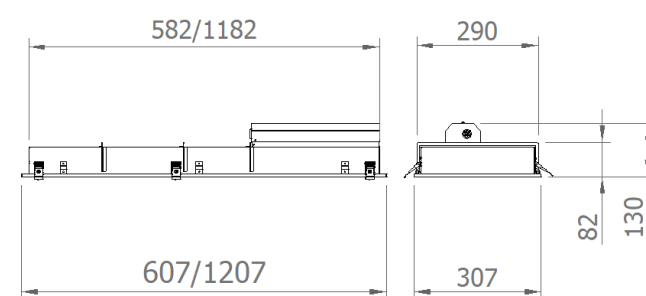


Pera is an architectural lighting solution that combines direct and indirect lighting in a single unit. While providing effective general lighting with its central diffuser structure, it creates a more balanced, comfortable, and spacious lighting effect thanks to the indirect light reflected from the side surfaces onto the ceiling.

Available in 30x60 cm and 30x120 cm sizes to adapt to different spatial needs, Pera offers a modern lighting approach, especially in offices, educational buildings, corporate spaces, and commercial projects. The combined use of direct and indirect light contributes to balancing illumination levels on both horizontal and vertical surfaces.

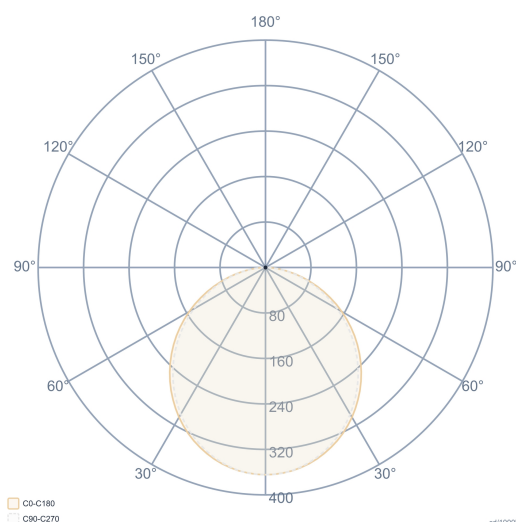

- Alçıpan tavan tipi.

General Information		Electrical Info		Lighting Technology	
Body & Frame	DKP Metal Sheet	Power	21W-42W	Light Output Angle	120°
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 19
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	307(W) x 607/1207(L) x 130(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Mounting Type	Recessed	LED Driver	Constant Current		
Mounting Part	Metal Bracket	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		
				DALI / 1-10V	
				Emergency Lighting Unit	
				CRI>90 , 2700K~6500K , Tunable White	

Order Code	W	Lm	CCT	L (mm)	Cut-out dimensions (mm)
02182.36.30.021	21	2200	3000	595	295x585
02182.36.40.022	21	2300	4000	595	295x585
02182.31.30.041	42	4400	3000	1195	295x1185
02182.31.40.043	42	4600	4000	1195	295x1185

