

SNOW IP65/40

05393

High-performance IP65 downlight fixture.


The Snow IP65 Series is a professional downlight solution that combines high durability, aesthetics, and performance with its aluminum injection molded body and frame structure.


Developed to achieve IP65 protection class, its special structure features a silicone seal under the glass cover, sealing gaskets used between the body and frame, and an IP65 connector detail working together to provide high protection against dust and moisture. This ensures reliable and long-lasting performance in demanding operating conditions.

Available in Ø190 and Ø230 mm diameter options, the Snow IP65 Series adapts to different ceiling heights and lighting needs, combining aesthetics with durability in indoor applications requiring high protection.

CE | GLOW WIRE 650°C | IP65 | IP40 | IK08 | RoHS COMPLIANT

RAL 9016 | RAL 9005 | RAL 9006

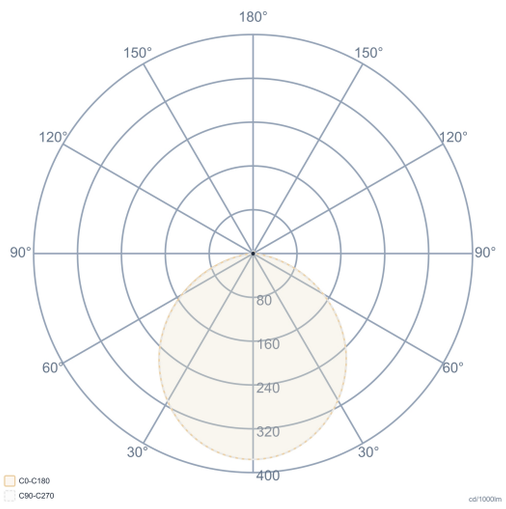

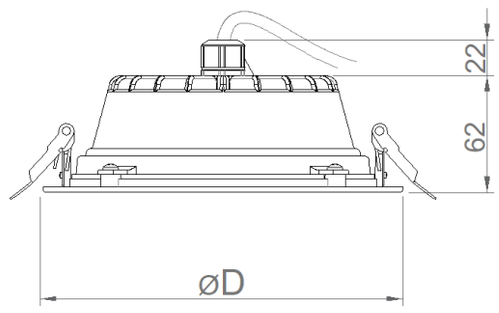

General Information	
Body & Frame	Aluminum Injection
Optics	Opal Diffuser + Glass
Paint	Electrostatic Powder Paint
Gasket	Transparent Silicone
Insulation Class	Class II
Product Dimensions [mm]	Ø190-Ø230 x 82(H)
Mounting Type	Recessed
Mounting Part	Steel Spring

Electrical Info	
Power	26-30W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit
External IP65 Drive Box

Order Code	W	Lm	CCT	ØD (mm)	Cut-out dimensions (mm)	Kg
05393.19.30.016	20	1500	3000	Ø190	Ø180	0,70
05393.19.40.018	20	1600	4000	Ø190	Ø180	0,70
05393.19.30.017	23	1750	3000	Ø190	Ø180	0,70
05393.19.40.021	23	1900	4000	Ø190	Ø180	0,70
05393.23.30.024	26	2450	3000	Ø230	Ø218	0,70
05393.23.40.025	26	2600	4000	Ø230	Ø218	0,70
05393.23.30.027	30	2700	3000	Ø230	Ø218	0,70
05393.23.40.026	30	2800	4000	Ø230	Ø218	0,70

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com