



SNOW IP65


05393

High-performance IP65 downlight fixture.

The Snow IP65 Series is a professional downlight solution that combines high durability, aesthetics, and performance with its aluminum injection molded body and frame structure.

Developed to achieve IP65 protection class, its special structure features a silicone seal under the glass cover, sealing gaskets used between the body and frame, and an IP65 connector detail working together to provide high protection against dust and moisture. This ensures reliable and long-lasting performance in demanding operating conditions.

Available in Ø190 and Ø230 mm diameter options, the Snow IP65 Series adapts to different ceiling heights and lighting needs, combining aesthetics with durability in indoor applications requiring high protection.

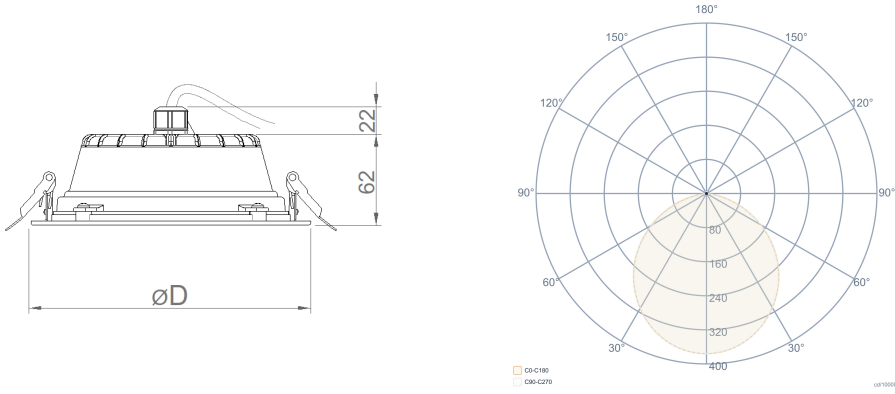

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	Power	26-30W	Light Output Angle	110°
Optics	Opal Diffuser + Glass	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Gasket	Transparent Silicone	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class II	Input Voltage	220-240V AC / 50-60 Hz	Optional	DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit
Product Dimensions [mm]	Ø190/Ø230 x 82 (H)	LED Driver	Constant Current		
Mounting Type	Recessed	Ambient Temperature	-20°C / +50°C		
Mounting Part	Steel Spring	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØD (mm)	Cut-out dimensions (mm)	Kg
05393.19.40.018	20	1600	4000	Ø190	Ø180	0,70

