



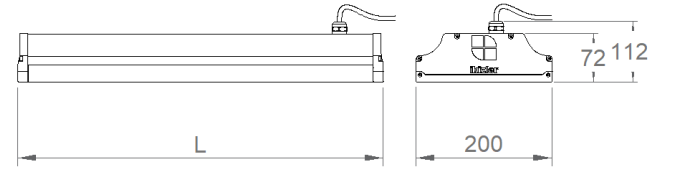

RAL 7016

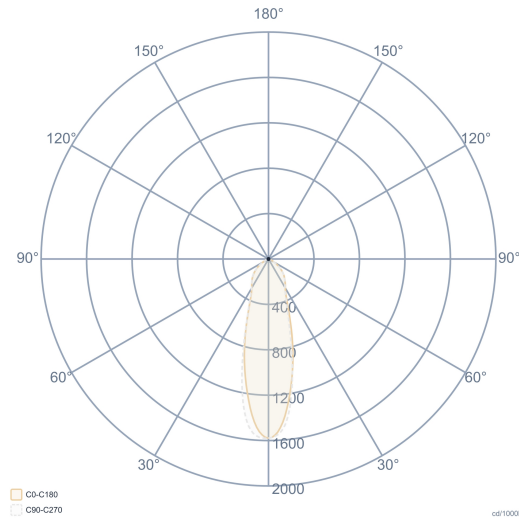

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	69-145W	Light Output Angle	30°,60°,90°,20x100°
Side Cover	PC Injection	Power Factor	>0.95	UGR Value	UGR ≤ 22
Optics	UV Stabilized Lens + Heat Resistant Tempered Clear Glass	Light Source	Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V Emergency Lighting Unit CRI>90 , 2700K~6500K , Tunable White Wire Cage Safety Filmed Glass	
Mounting Type	Surface	LED Driver	Constant Current		
Mounting Part	Metal Bracket	Ambient Temperature	-40°C / +60°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	L (mm)	Kg
07308.4C.40.105	69	10020	4000	450	3,50
07308.6C.40.170	110	15975	4000	600	5,10
07308.7C.40.228	150	21750	4000	745	6,60