

SNOW-T


03170

Cylindrical Surface Mounted Lighting Fixture

The Snow-T Series is a professional surface-mounted downlight solution that combines aesthetics and performance with its aluminum injection-molded body. Thanks to its simple design and homogeneous light distribution, it offers comfortable lighting in offices, shops, hotels, educational buildings, and commercial spaces. Its compact structure, mounted directly to the ceiling, provides a stylish and functional solution, especially in projects where recessed installation is not possible.

Available in Ø185mm, Ø225mm, and Ø263mm diameter options, the adapts to different ceiling heights and lighting needs, and offers various power, color temperature, and control options to meet project-specific lighting scenarios.

RAL 9016 RAL 9005 RAL 9006

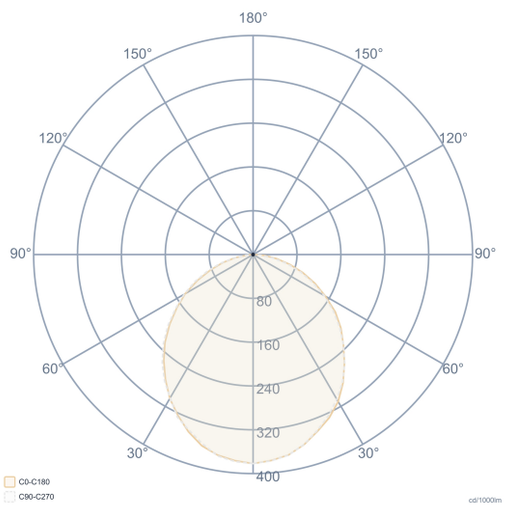



General Information	
Body & Frame	Aluminum Injection
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø185/225/263x130(H)
Mounting Type	Surface
Mounting Part	Screw and Dowel Set

Electrical Info	
Power	10W-30W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	ØD x H (mm)	Kg
03170.18.30.007	10	1000	3000	Ø185x130	0,90
03170.18.40.007	10	1150	4000	Ø185x130	0,90
03170.18.30.009	14	1380	3000	Ø185x130	0,90
03170.18.40.010	14	1560	4000	Ø185x130	0,90
03170.22.30.018	20	2200	3000	Ø225x130	1,10
03170.22.40.019	20	2400	4000	Ø225x130	1,10
03170.22.30.021	23	2530	3000	Ø225x130	1,10
03170.22.40.022	23	2760	4000	Ø225x130	1,10
03170.23.30.032	30	3450	3000	Ø263x130	1,30
03170.23.40.032	30	3600	4000	Ø263x130	1,30

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com