




SNOW-T

03170

Cylindrical Surface Mounted Lighting Fixture

The Snow-T Series is a professional surface-mounted downlight solution that combines aesthetics and performance with its aluminum injection-molded body. Thanks to its simple design and homogeneous light distribution, it offers comfortable lighting in offices, shops, hotels, educational buildings, and commercial spaces. Its compact structure, mounted directly to the ceiling, provides a stylish and functional solution, especially in projects where recessed installation is not possible.

Available in Ø185mm, Ø225mm, and Ø263mm diameter options, the adapts to different ceiling heights and lighting needs, and offers various power, color temperature, and control options to meet project-specific lighting scenarios.

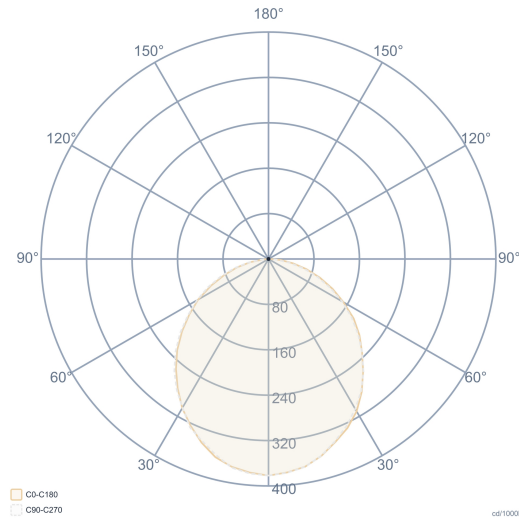

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	Power	10W-30W	Light Output Angle	110°
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	Ø185/225/263x130(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Surface	LED Driver	Constant Current		
Mounting Part	Screw and Dowel Set	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØD x H (mm)	Kg
03170.18.30.007	10	1000	3000	Ø185x130	0,90
03170.18.40.007	10	1150	4000	Ø185x130	0,90
03170.18.30.009	14	1380	3000	Ø185x130	0,90
03170.18.40.010	14	1560	4000	Ø185x130	0,90
03170.22.30.018	20	2200	3000	Ø225x130	1,10
03170.22.40.019	20	2400	4000	Ø225x130	1,10
03170.22.30.021	23	2530	3000	Ø225x130	1,10
03170.22.40.022	23	2760	4000	Ø225x130	1,10
03170.23.30.032	30	3450	3000	Ø263x130	1,30
03170.23.40.032	30	3600	4000	Ø263x130	1,30

