




## SNOW-T

### 03170

#### Cylindrical Surface Mounted Lighting Fixture

The Snow-T Series is a professional surface-mounted downlight solution that combines aesthetics and performance with its aluminum injection-molded body. Thanks to its simple design and homogeneous light distribution, it offers comfortable lighting in offices, shops, hotels, educational buildings, and commercial spaces. Its compact structure, mounted directly to the ceiling, provides a stylish and functional solution, especially in projects where recessed installation is not possible.

Available in Ø185mm, Ø225mm, and Ø263mm diameter options, the adapts to different ceiling heights and lighting needs, and offers various power, color temperature, and control options to meet project-specific lighting scenarios.

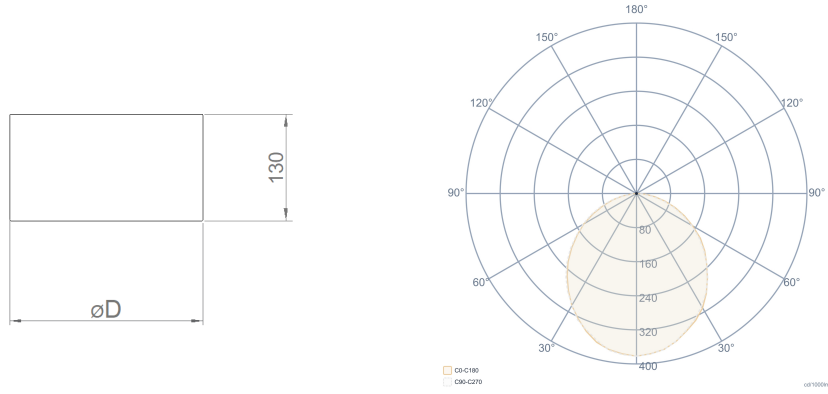

| General Information            |                            | Electrical Info            |                        | Lighting Technology                                                                                |              |
|--------------------------------|----------------------------|----------------------------|------------------------|----------------------------------------------------------------------------------------------------|--------------|
| <b>Body &amp; Frame</b>        | Aluminum Injection         | <b>Power</b>               | 10W-30W                | <b>Light Output Angle</b>                                                                          | 110°         |
| <b>Optics</b>                  | Opal Diffuser              | <b>Power Factor</b>        | >0.95                  | <b>UGR Value</b>                                                                                   | UGR ≤ 22     |
| <b>Paint</b>                   | Electrostatic Powder Paint | <b>Light Source</b>        | SMD Mid Power LED      | <b>CRI [Ra]</b>                                                                                    | CRI ≥ 80     |
| <b>Insulation Class</b>        | Class I                    | <b>Cabling</b>             | Halojen-Free           | <b>Color Bin Value</b>                                                                             | Mc Adams ≤ 3 |
| <b>Product Dimensions [mm]</b> | Ø185/225/263x130(H)        | <b>Input Voltage</b>       | 220-240V AC / 50-60 Hz | <b>Optional</b><br>DALI / 1-10V<br>CRI>90 , 2700K~6500K , Tunable White<br>Emergency Lighting Unit |              |
| <b>Mounting Type</b>           | Surface                    | <b>LED Driver</b>          | Constant Current       |                                                                                                    |              |
| <b>Mounting Part</b>           | Screw and Dowel Set        | <b>Ambient Temperature</b> | -20°C / +50°C          |                                                                                                    |              |
|                                |                            | <b>LED Lifetime L70</b>    | >50.000 Hour           |                                                                                                    |              |

| Order Code      | W  | Lm   | CCT  | ØD x H (mm) | Kg   |
|-----------------|----|------|------|-------------|------|
| 03170.23.40.032 | 30 | 3600 | 4000 | Ø263x130    | 1,30 |

