


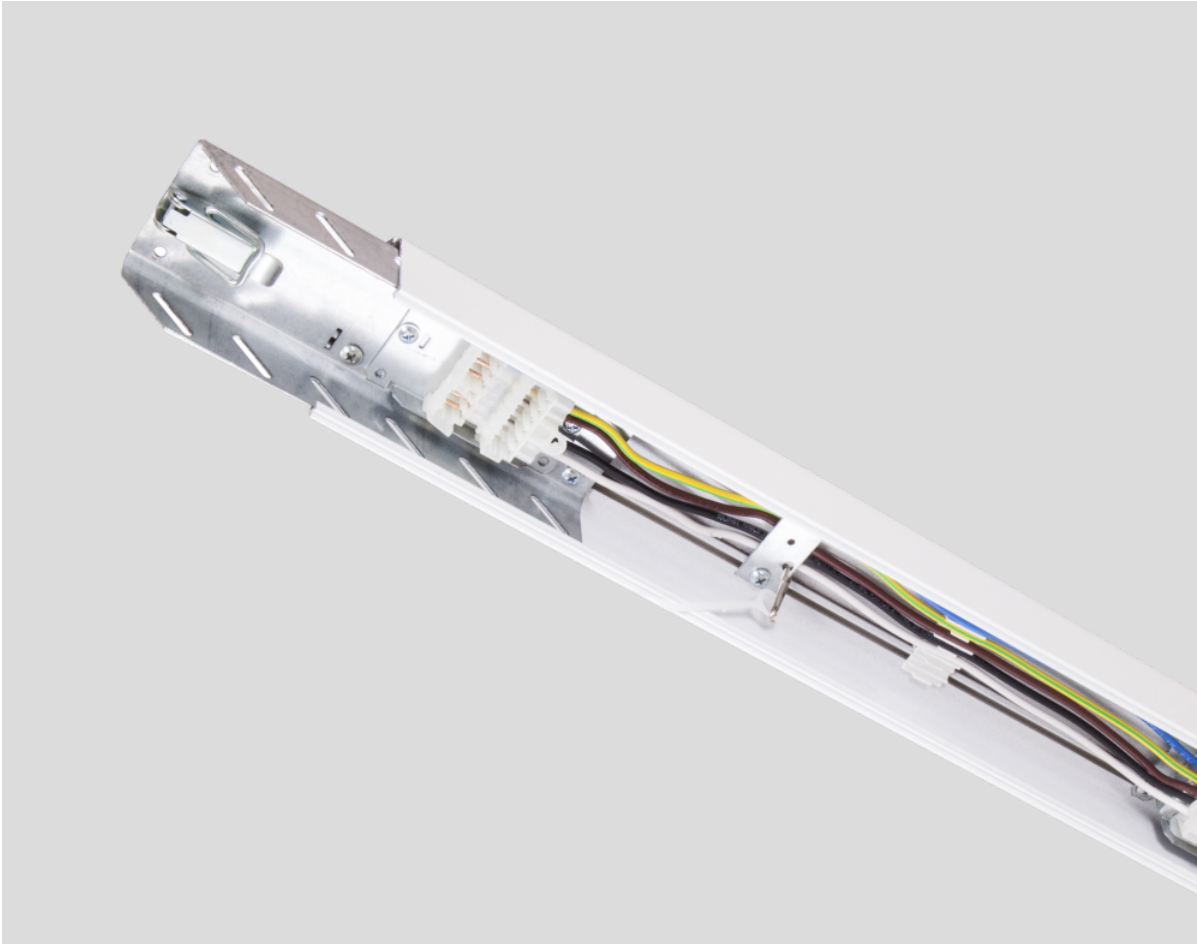

RAL 9016 RAL 9005


Energy Units

07200

Uninterrupted Power, Modular Infrastructure

The energy unit is the main carrier profile in trunking systems that ensures the safe and uninterrupted transmission of energy from a single supply point along the line. Thanks to its integrated copper conductor structure, lighting units can be easily mounted at the desired point, their locations can be changed as needed, or new modules can be added to the system.

It offers flexible solutions for projects with 5, 7, and 9 conductor cable options suitable for phase selection, halogen-free cable structure, and a connector system with phase selection. Thanks to its quick installation, low cabling costs, and easy maintenance advantages, it provides reliable and long-lasting uninterrupted lighting in warehouses, logistics centers, production facilities, supermarkets, and large commercial areas.

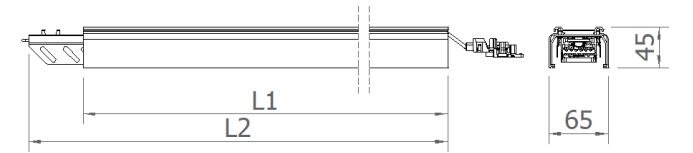

General Information		Electrical Info	Lighting Technology
Housing	Electrostatic powder-coated aluminum profile		
Connector	Phase selectable stripped (5-7-9 pin)		
Cable	2,5mm ² Halogen-Free		
Insulation Class	Class I		
Product Dimensions [mm]	65(W)x45(H)		
Mounting Type	Surface and Pendant		
Mounting Part	Stainless Spring Steel		

Optional

Order Code	Product Type	L1(mm)	L2(mm)	Cable Connections	Reflector Color	Kg
07200.000.005.002	5	1413	1493	L1-L2-L3-N-S	Açık-Kapalı	1,65
07200.000.005.004	5	2826	2906	L1-L2-L3-N-S	Açık-Kapalı	3,30
07200.000.007.002	7	1413	1493	L1-L2-L3-N-S-(D1-D2) / (EL-EN)	DALI veya KİT	1,75
07200.000.007.004	7	2826	2906	L1-L2-L3-N-S-(D1-D2) / (EL-EN)	DALI veya KİT	3,50
07200.000.009.002	9	1413	1493	L1-L2-L3-N-S-D1-D2-EL-EN	DALI ve KİT	1,85
07200.000.009.004	9	2826	2906	L1-L2-L3-N-S-D1-D2-EL-EN	DALI ve KİT	3,70

