


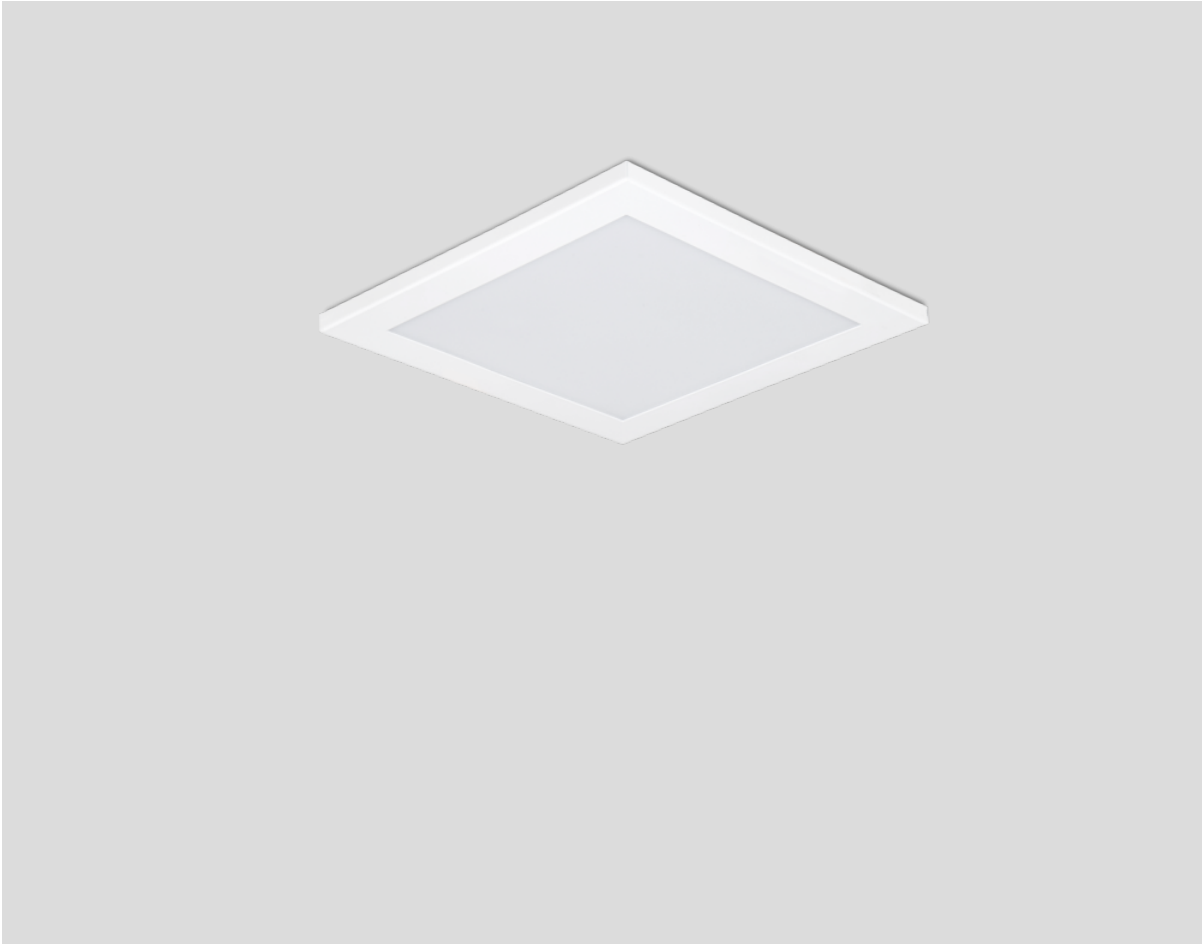

CANVAS



05247

Recessed Square Downlight Fixture

The CANVAS Series, with its metal sheet body structure and square form, is a stylish and functional recessed downlight solution developed for modern architectural projects. Thanks to its simple design and homogeneous light distribution, it provides balanced lighting to the space while offering an aesthetic appearance that integrates seamlessly with the ceiling surface.

It adapts to project-specific lighting scenarios with various power, color temperature, and control options. Its Class II electrical protection structure offers high safety standards.

It easily adapts to different application environments such as offices, shops, hotels, educational buildings, and commercial areas.

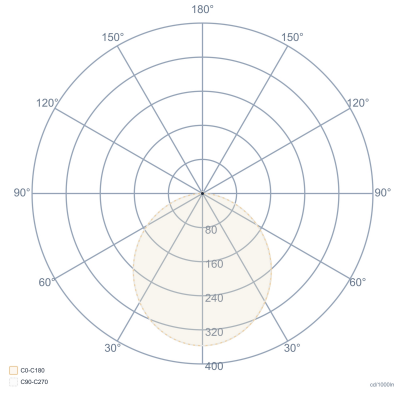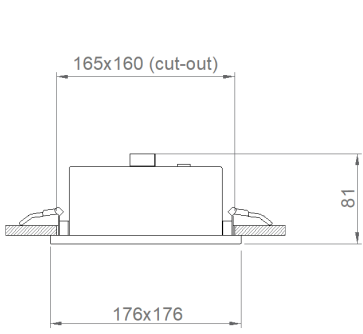

General Information		Electrical Info		Lighting Technology	
Material	DKP Metal Sheet	Power	13-18W	Light Output Angle	110°
Frame	Metal Sheet	Power Factor	>0.95	UGR Value	UGR ≤ 22
Optics	Opal Diffuser	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class II	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Product Dimensions [mm]	175(W) x 175(L) x 81(H)	LED Driver	Constant Current		DALI / 1-10V
Mounting Type	Recessed	Ambient Temperature	-20°C / +50°C		CRI>90 , 2700K~6500K , Tunable White
Mounting Part	Steel Spring	LED Lifetime L70	>50.000 Hour		Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
05247.22.30.015	13	1120	3000	175x175x81	165x160	0,60
05247.22.40.016	13	1200	4000	175x175x81	165x160	0,60
05247.22.30.021	18	1450	3000	175x175x81	165x160	0,60
05247.22.40.022	18	1520	4000	175x175x81	165x160	0,60

