


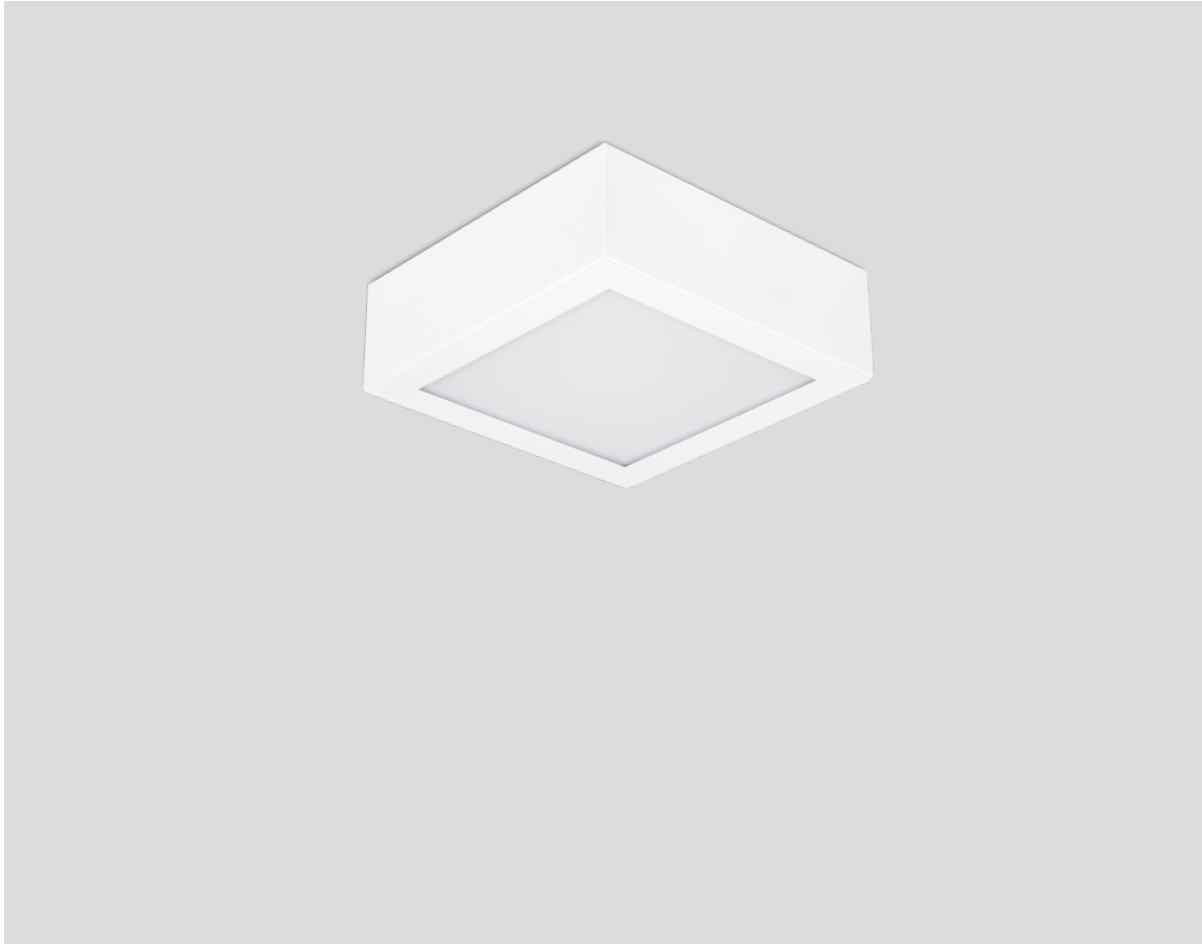



CANVAS-T

05250

Surface Mounted Square Downlight Fixture

CANVAS-T is a stylish and functional surface-mounted downlight solution developed for modern architectural projects, featuring a metal sheet body and a square form. Its surface mounting design offers a practical and decorative solution for projects where there is no suspended ceiling space or where recessed installation is not preferred.

It adapts to project-specific lighting scenarios with various power, color temperature, and control options. Its Class II electrical protection ensures high safety standards and reliable use. It is suitable for various application environments such as offices, shops, hotels, educational buildings, and commercial spaces.

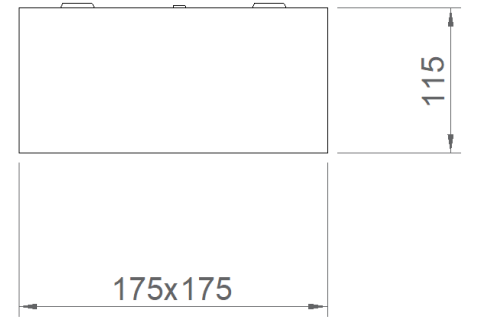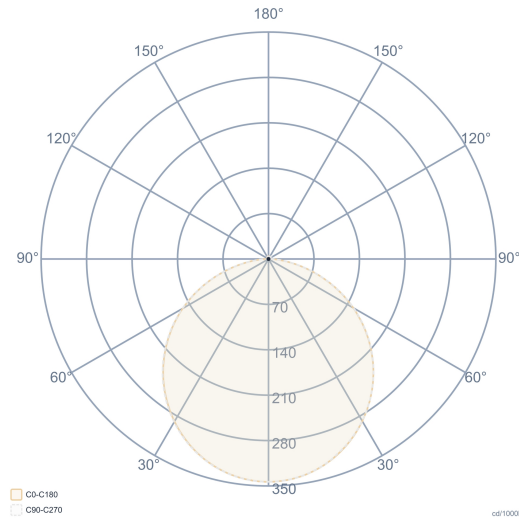

General Information		Electrical Info		Lighting Technology	
Housing	DKP Metal Sheet	Power	13-18W	Light Output Angle	110°
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 25
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	175(W) x 175(L) x 115(H)	Input Voltage	220-240V / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Surface	LED Driver	Constant Current		
Mounting Part	Screw Dowel Set	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
05250.22.30.015	13	650	3000	175x175x115	1,10
05250.22.40.016	13	720	4000	175x175x115	1,10
05250.22.30.021	18	900	3000	175x175x115	1,10
05250.22.40.022	18	1000	4000	175x175x115	1,10