



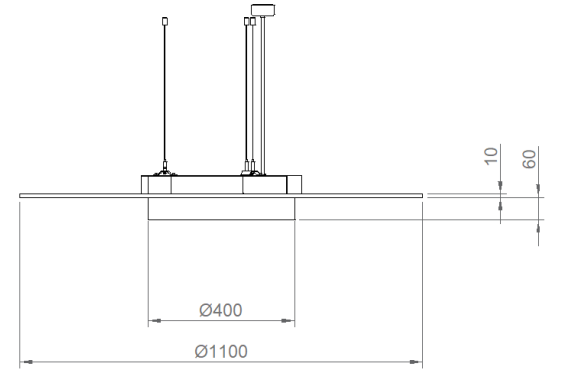

RAL 9005 RAL 9006

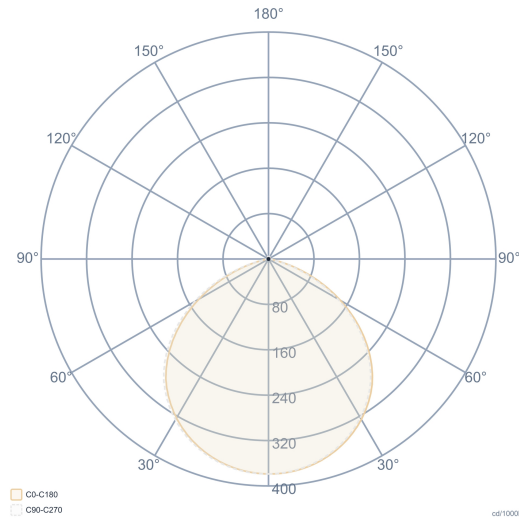

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	30W	Light Output Angle	120°
Panel	Acoustic Felt	Power Factor	>0.95	UGR Value	UGR ≤ 22
Optics	Opal Diffuser	Light Source	SMD Mid Power LED	CRI [Ra]	CR ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Product Dimensions [mm]	Ø1100x60mm	LED Driver	Constant Current		
Mounting Type	Pendant	Ambient Temperature	-20°C / +50°C		
Mounting Part	Height Adjustable Steel Wire	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	L (mm)
03170.11.30.029	30	2950	3000	1100x60
03170.11.40.029	30	3100	4000	1100x60